Double Pipe Creek Watershed Carroll County, Maryland Interim Restoration Plan

2019



Prepared by Carroll County Government Bureau of Resource Management



Forward

This document summarizes proposed and potential restoration strategies to meet local Total Maximum Daily Load (TMDL) requirements associated with the urban wasteload allocation (WLA) for Double Pipe Creek Watershed within Carroll County, Maryland. This document is an ongoing, iterative process that will be updated as needed to track implementation of structural and nonstructural projects, alternative Best Management Practices (BMP's), and any program enhancements that assist in meeting Environmental Protection Agency (EPA) approved TMDL stormwater WLAs. Updates will evaluate the success of Carroll County's watershed restoration efforts and document progress towards meeting approved stormwater WLAs. Some of the strategies presented in this document are considered "potential" and additional assessment will be required before any project is considered final or approved.



Table of Contents

Double Pipe Creek Watershed Restoration Plan

Forwa	ırd	i
I.	Introduction	1
A.	Purpose and Scope	1
1		1
B.	Regulatory Setting and Requirements	4
1		4
2		
3	. Total Maximum Daily Loads (TMDLs)	6
II.	Background	8
A.	Location and Subwatershed Map	8
В.	Baseline and Current Land Use	8
1	. Impervious Surfaces	9
C.	Watershed Characterization	13
1		
2		
3	Priority Watersheds	15
III.	New Development	17
A.	Build-Out Analysis	17
В.	Stormwater Management	17
C.	County Easements	
D.	Rural Legacy Areas	19
IV.	Public Outreach and Education	22
A.	Water Resources Coordination Council	22
1	. Carroll County NPDES MS4 Team	22
B.	Environmental Advisory Council (EAC)	23
1	. Community Outreach	23
C.	Public Outreach Plan	23
D.	Educational Venues	23
V.	Restoration Implementation	26
A.	Stormwater Management Facilities	26
B.	Storm Drain Outfalls	28
C.	Rain Gardens	28

D.	Tree Planting and Reforestation	30
1.	Residential Buffer Plantings	30
2.	Municipal Plantings	31
E.	Stream Restoration	33
F.	Streambank Regeneration	33
G.	Road Maintenance Projects	34
H.	Septic Systems	
I.	Agricultural Best Management Practices (BMPs)	
VI.	Local TMDL Project Tracking, Reporting, Modeling and Monitoring	
A.	Data Reporting	
В.	Modeling with Mapshed	36
1.	1	
2.	Restoration Progress: December 2019	36
3.		40
C.	Water Quality Monitoring	41
1.	8	
2.	8	
VII.	Chesapeake Bay Restoration.	47
A.	River Segment Location	47
B.	Restoration Progress	
VIII.	TMDL Implementation	50
A.	Bacteria Implementation	50
IX.	Caveats	
X.	Public Participation	51
XI.	References	52
XII.	Appendix A: Watershed Restoration Projects	55
XIII.	Appendix B: Water Resource and Floodplain Protection Easements	56
XIV.	Appendix C: Double Pipe Creek BAT Septic Systems	60
XV. Cover	Appendix D: Local TMDL Load Reduction Calculations with GWLF-E Land Loading Rates and MDE (2014)	
XVI.	Appendix E: GWLF-E Modeling Assumptions	71
1.	Model Inputs	71
2.	BMP Assumptions	73
XVII.	Appendix F: Chesapeake Bay TMDL Edge-of-Stream Load Reduction	77

Figures

Figure 1: Double Pipe Creek Watershed and Subwatersheds Map
Figure 2: Double Pipe Creek Watershed Land Use/Land Cover
Figure 3: Double Pipe Creek Watershed Impervious Surface Area
Figure 4: Targeted Ecological Areas
Figure 5: Double Pipe Creek Watershed Build-Out Parcels
Figure 6: Water Resource and Floodplain Protection Easement Locations
Figure 7: Little Pipe Creek Rural Legacy Area
Figure 8: Stormwater Management Locations
Figure 9: Stream Buffer Initiative Locations
Figure 10: 2019 Restoration Progress - Phosphorus
Figure 11: 2019 Restoration Progress – Sediment
Figure 12: Farm Museum Monitoring Location
Figure 13: Greens of Westminster Monitoring Location
Figure 14: Bacteria Monitoring Locations
Figure 15: Chesapeake Bay River Segments
Tables
Table 1: Maryland Designated Uses
Table 2: Freshwater Bacteria Criteria (MPN/100mL)
Table 3: Double Pipe Creek 8-digit Watershed Bacteria TMDL 6
Table 4: Double Pipe Creek 8-Digit Watershed Phosphorus TMDL
Table 5: Double Pipe Creek 8-Digit Watershed Sediment TMDL
Table 6: Double Pipe Creek Watershed Baseline and Current Land Cover
Table 7: Double Pipe Creek Watershed Estimated Impervious Surface Area
Table 8: Subwatershed Erosion Statistics
Table 9: MS4 Public Outreach Events
Table 10: Proposed Stormwater Management Projects
Table 11: Stream Buffer Plantings

Table 13: Comparison of Total Phosphorus and Total Suspended Sediment Delivered Load Reductions by Restoration Strategies	. 38
Table 14: Total Phosphorus and Total Suspended Sediment Load Reduction in the Double Pipe Creek Watershed in Carroll County	. 38
Table 15: Waste Collection Infrastructure Upgrades	40
Table 16: Water Quality Parameters and Methods	41
Table 17: Bacteria Monitoring Annual Data MPN/100mL	44
Table 18: Bacteria Monitoring Seasonal Data (May 1 – September 30) MPN/100mL	44
Table 19: Single Sample Exceedance Frequency	45
Table 20: Carroll County Bay TMDL	48
Table 21: Nutrient TMDL Benchmarks	50
Appendices	
Appendix A- Watershed Restoration Projects	55
Appendix B- Water Resource and Floodplain Protection Easements	56
Appendix C – Double Pipe Creek BAT Septic Systems	60
Appendix D- Calculations with GWLF-E Land Cover Loading Rates and MDE (2014)	62
Appendix E – GWLF-E Modeling Assumptions	71
Appendix F - Chesapeake Bay TMDL Edge-of-Stream Load Reduction Calculations	.77



I. Introduction

The Double Pipe Creek Watershed (Figure 1) was placed on Maryland's 303(d) list of impaired waters for nutrients and sediment in 1996, and again for bacteria in 2002. A TMDL for sediment was developed and approved in September of 2008, with a subsequent TMDL for phosphorus developed and approved in August of 2012. The 2003 bacteria listing was addressed with a TMDL that was developed and approved in December of 2009.

The Bureau of Resource Management (BRM), in part to fulfill the County's regulatory requirements as designated through the National Pollutant Discharge Elimination System (NPDES) Municipal Separate Storm Sewer System (MS4) permit has initiated watershed restoration planning to address the developed and approved watershed TMDL Wasteload Allocations (WLA). Additional stakeholders in this planning process include the Towns of Manchester, New Windsor, and Union Bridge, the Cities of Taneytown and Westminster, as well as the Monocacy Scenic River Citizens Advisory Board.

A. Purpose and Scope

This document presents restoration strategies that are proposed to meet watershed-specific water quality standards, associated TMDL WLAs for developed source types for Carroll County. In addition, restoration goals include the protection of source water for Double Pipe Creek and ecologically sensitive and threatened species. This Watershed Restoration Plan also establishes a reporting framework for project tracking, monitoring, and reporting and was developed to meet the restoration plan requirement designated in the County's NPDES MS4 Permit (Section IV.E.2).

1. Document Organization

Section I: Introduction; discusses the history of TMDL development within the Double Pipe Creek Watershed, outlines the purpose and scope of this document, and provides a description of water quality standards and the TMDL's being addressed by this document.

Section II: Background; describes the location of the watershed and outlines any ecologically sensitive areas as well as locations of tier II waters within the watershed. This section will also summarize the stream corridor assessment (SCA) that was performed by the Bureau of Resource Management and identifies priority watersheds based on the assessment. The background section will also look at baseline and current land use within the Carroll County portion of the Double Pipe Creek Watershed.

Section III: New Development; this section will discuss the Chapter 154; Water Resource Ordinance and how easements are set aside in perpetuity during the development phase to protect ground and surface water resources across the watershed. This section will also summarize the build-out analysis done for the watershed and discuss the Rural Legacy Area that encompasses most of the watershed.

Section IV: Public Outreach and Education; summarizes the current outreach being undertaken by the County and discusses the various councils and the role they play in watershed restoration.

Section V: Restoration Implementation; Describes the BMPs and restoration projects that have been either completed or proposed to meet the local TMDL requirements for the Double Pipe Creek Watershed. Appendix A will also provide a complete list of restoration activities, their associated reduction values, subwatershed location, project status, and anticipated completion.

Section VI: Project Tracking, Reporting, and Monitoring; defines how data will be tracked and summarized to document the success of this plan in improving water quality conditions, and will document progress made through practice implementation, as well as discuss the current monitoring efforts within the watershed.

Section VII: Chesapeake Bay Restoration; describes progress towards achieving the County's TMDL requirements associated with the stormwater WLA for the Chesapeake Bay watershed; BMPs and restoration projects that have been either completed or proposed to address local TMDL's within the Watershed will ultimately reduce loadings to the Chesapeake Bay.

Section VIII: Caveats; explains that this document provides potential restoration strategies that require additional assessment, and that implementation of projects depends on funding and prioritization with other projects County-wide.

Section IX: Public Participation; public outreach of this restoration plan will focus on landowners who will potentially be affected by the watershed plan. Inputs from any stakeholder or the public will be gathered during the public comment period, and addressed before the final plan is released.

Section X: References; provides a list of the references sited in this document

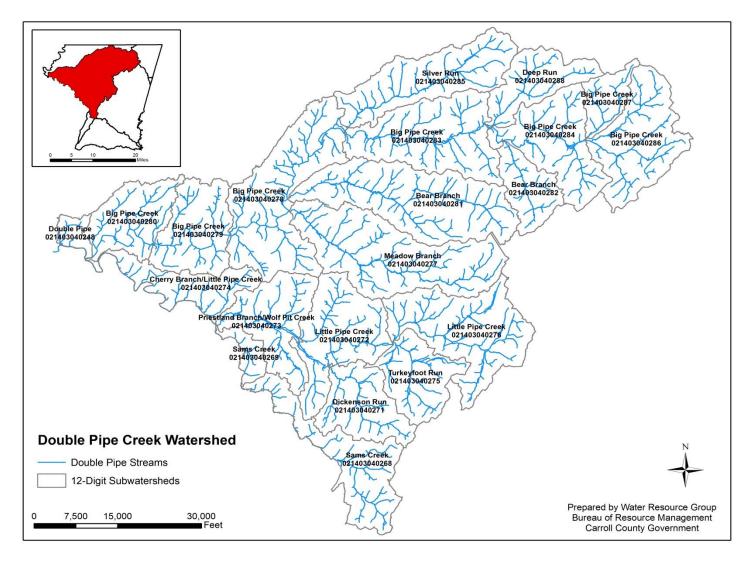


Figure 1: Double Pipe Creek Watershed and Subwatersheds Map

B. Regulatory Setting and Requirements

Maryland water quality standards have been adopted per the Federal Clean Water Act Section 101 to "restore and maintain the chemical, physical, and biological integrity of the Nation's waters". Individual standards are established to support the beneficial uses of water bodies such as fishing, aquatic life, drinking water supply, boating, water contact recreation as well as terrestrial wildlife that depend on water.

The County's NPDES MS4 permit requires that a restoration plan for each stormwater WLA approved by EPA be submitted to MDE for approval. Any subsequent TMDL WLA approved by the EPA is required to be addressed in a restoration plan within one year of EPA approval.

1. Use Class Designations and Water Quality Standards

All bodies of water, including streams within Maryland and all other states, are each assigned a designated use. Maryland's designated water uses are identified in the Code of Maryland Regulations (COMAR) 26.08.02.08. The designated use of a water body refers to its anticipated use and any protections necessary to sustain aquatic life. Water quality standards refer to the criteria required to meet the designated use of a water body. A listing of Maryland's designated water uses are as follows:

- Use I: Water contact recreation, and protection of nontidal warm water aquatic life.
- Use II: Support of estuarine and marine aquatic life and shellfish harvesting (not all subcategories apply to each tidal water segment)
 - Shellfish harvesting subcategory
 - Seasonal migratory fish spawning and nursery subcategory (Chesapeake Bay only)
 - Seasonal shallow-water submerged aquatic vegetation subcategory (Chesapeake Bay only)
 - Open-water fish and shellfish subcategory (Chesapeake Bay only)
 - Seasonal deep-water fish and shellfish subcategory (Chesapeake Bay only)
 - o Seasonal deep-channel refuge use (Chesapeake Bay only)
- Use III: Nontidal cold water usually considered natural trout waters
- Use IV: Recreational trout waters waters are stocked with trout

If the letter "P" follows the use class listing, that particular stream has been designated as a public water supply. The designated use and applicable use classes can be found in Table 1.

Table 1: Maryland Designated Uses

	Use Classes							
Designated Uses	1	I-P	II	II-P	III	III-P	IV	IV-P
Growth and Propagation of fish (not trout), other aquatic life and wildlife	✓	✓	✓	~	V	✓	✓	✓
Water Contact Sports	V	V	V	~	1	~	~	1
Leisure activities involving direct contact with surface water	V	~	✓	✓	✓	~	✓	~
Fishing	V	V	V	V	V	V	V	V
Agricultural Water Supply	1	✓	✓	V	1	✓	1	V
Industrial Water Supply	V	✓	✓	✓	✓	✓	V	V
Propagation and Harvesting of Shellfish			V	V				4.5
Seasonal Migratory Fish Spawning and Nursery Use			✓	~				
Seasonal Shallow-Water Submerged Aquatic Vegetation Use	2		✓	~				
Open-Water Fish and Shellfish Use			V	V				
Seasonal Deep-Water Fish and Shellfish Use			✓	✓				
Seasonal Deep-Channel Refuge Use			V	✓				
Growth and Propagation of Trout					V	V		
Capable of Supporting Adult Trout for a Put and Take Fishery							✓	V
Public Water Supply		V		V	<	V		V

a. Double Pipe Creek Water Quality Standards

The entire portion of the Double Pipe Creek Watershed within Carroll County is designated as use IV-P, Recreational Trout Waters. The use IV-P is capable of supporting adult trout for a put-and-take fishery, but may not be capable for growing and propagating trout.

2. Water Quality Criteria

Water quality criteria is developed for each designated use and defines the level or pollutant concentration allowable to support that designated use (EPA, 2008). An example would be the human health criteria for bacteria, which are based on full body contact for a single sample or a steady state geometric mean of five samples. The freshwater criteria for bacteria are listed in Table 2.

Table 2: Freshwater Bacteria Criteria (MPN/100 mL)

Steady State		Maximum Allowable Density – Single Sample					
Indicator	Geometric Mean Density	Frequent Full Body Contact Moderately Frequent Full Body Contact		Occasional Full Body Contact	Infrequent Full Body Contact		
E. Coli	126	235	298	410	576		

3. Total Maximum Daily Loads (TMDLs)

A TMDL establishes the maximum amount of an impairing substance or stressor that a waterbody can assimilate and still meet Water Quality Standards (WQS). TMDLs are based on the relationship between pollution sources and in-stream water quality conditions (mde.state.md.us). TMDLs calculate pollution contributions from the entire watershed and then allocate reduction requirements to the various contributing sources. Within the Double Pipe Creek Watershed, these allocations are divided among counties and municipalities and then further divided by sources, including agricultural, wastewater, and stormwater. The Memorandum of Agreement (MOA) between the County and each of the Municipalities has combined the jurisdictions into one permit. This restoration plan will concentrate on joint requirements for reducing TMDL loadings associated with the stormwater WLA.

a. Bacteria

The current estimated stormwater baseline load for bacteria within the Carroll County portion of Double Pipe Creek Watershed was determined by (MDE, 2009) to be 4,423,635 billion MPN/year (MPN, or most probable number is a technique used to estimate microbial populations). The TMDL to meet the watersheds designated use was determined by MDE to be 67,365 billion MPN/year, which is a reduction of 4,356,270 billion MPN/year (98.5%) from the current estimated loading.

These maximum practicable reduction targets are based on the available literature and best professional judgment. There is much uncertainty with estimated reductions from BMPs. In certain watersheds, the goal of meeting water quality standards may require very high reductions that are not achievable with current technologies and management practices (MDE, 2009). Table 3 outlines the bacteria baseline and TMDL for the Carroll County portion of the Double Pipe Creek Watershed.

Table 3: Double Pipe Creek 8-digit Watershed Bacteria TMDL

Double	Percent		
Jurisdiction	Baseline (Billion MPN/yr)	TMDL (Billion MPN/yr)	Reduction
Carroll County	4,423,635	67,365	98.5%
Total		67,365	98.5%

b. Phosphorus

The current estimated stormwater baseline load for Carroll County was determined by (MDE, 2012) to be 16,129 lbs. /yr., the TMDL for the stormwater WLA was determined to be 4,441 lbs. /yr., which is a reduction of 11,688 lbs. /yr. (72%) from the current loading (Table 4). The baseline loads for the County and Towns were derived from the TMDL Data Center. These baseline loads were combined and compared to the combined allocations for the County and Towns to derive the total percent reduction required. Estimating a load contribution from the stormwater Phase I and II sources is imprecise, given the variability in sources, runoff volumes, and pollutant loads over time (MDE, 2012).

Table 4: Double Pipe Creek 8-digit Watershed Phosphorus TMDL

Jurisdiction	Baseline (lbs/yr)	TMDL (lbs/yr)	Percent Reduction
Carroll County	9,316	2,329	75%
Municipalities	6,813	2,112	69%
Total	16,129	4,441	72%

Phosphorus remains as the only nutrient TMDL within the watershed and has been determined by MDE to be the limiting nutrient. If phosphorus is used up or removed, excess algal growth within the system will cease.

c. Sediment

The current estimated stormwater baseline load for Carroll County as determined by (MDE, 2008) is 4,759 tons/yr., the TMDL for the stormwater WLA was determined to be 3,149 tons/yr., which is a reduction of 1,610 tons/yr. (34%) from the current loading (Table 5).

Table 5: Double Pipe Creek 8-digit Watershed Sediment TMDL

Jurisdiction	Baseline	TMDL	Percent Reduction
Carroll County	4,759	3,149	34%
Total	4,759	3,149	34%

II. Background

A. Location and Subwatershed Map

The Carroll County portion of the Double Pipe Creek Watershed is located along the western portion of the County. The watershed is within the Potomac River Basin, which lies within the Piedmont physiographic province of Maryland. There are twenty one (21) major sub-watersheds in the County that cover a total land area of 105,457 acres. Figure 1 depicts the location of the Double Pipe Creek Watershed and its subwatersheds.

B. Baseline and Current Land Use

As the land use of a watershed is modified over time it will ultimately influence the water quality within that watershed. Natural landscapes, like forests and grasslands allow for infiltration of stormwater while absorbing excess nutrients. Unmanaged impervious surfaces don't allow for infiltration, causing stormwater to concentrate. The increased runoff velocity will de-stabilize stream banks, causing potential sedimentation problems downstream. Within the Double Pipe Creek Watershed, agriculture is the dominant land cover at about 60 percent of the total land, followed by forest which accounts for 20 percent, and residential, which accounts for about 12 percent of the total land cover. Mixed urban accounts for less than 3 percent of the total land cover, which represents the relatively rural nature of the Double Pipe Creek Watershed.

The 2011 National Land Cover Database (NLCD) data was compared to current property data and existing land uses within the county in order to identify any gaps in urban land cover. Additional areas identified as urban were based on Section II.4 (Table 1) of MDE's 2014 Accounting for Stormwater WLA document, and consisted of rural residential lots less than three (3) acres that were listed as non-urban land uses within the NLCD database. This analysis showed a 5% increase in low-density residential land cover since 2011, which has been incorporated into Table 6.

Table 6 shows the current land cover data for the Double Pipe Creek Watershed, as well as the changes in land cover over time since 2001. The current land cover, as of 2011, within Double Pipe Creek can be found in Figure 2.

Table 6: Double Pipe Creek Watershed Baseline and Current Land Cover

Land Use	Acres 2001	Percent 2001	Acres 2006	Percent 2006	Acres 2011	Percent 2011	Current Acres	Percent
Open Water	28	<1%	33	<1%	48	<1%	47	<1%
Low-Density Residential	7,375	7%	7,566	7%	7,636	7%	12,827	12%
Low-Density Mixed Urban	2,234	2%	2,344	2%	2,405	2%	2,405	2%
Medium- Density Mixed	385	<1%	508	<1%	591	<1%	591	<1%
High-Density Mixed Urban	64	<1%	110	<1%	129	<1%	129	<1%
Barren Land	241	<1%	276	<1%	263	<1%	260	<1%
Forest	23,894	23%	23,808	23%	23,742	23%	21,201	20%
Shrub/Scrub	1,057	1%	1,051	1%	1,091	1%	1,014	<1%
Grassland	127	<1%	193	<1%	203	<1%	189	<1%
Pasture/Hay	24,083	23%	23,630	22%	23,596	22%	22,237	21%
Cropland	44,409	42%	44,384	42%	44,192	42%	41,054	39%
Wetland	1,532	1.5%	1,526	1.5%	1,533	1.5%	1,492	1.4%

Source: National Land Cover Database

1. Impervious Surfaces

An increase in impervious surface cover within a watershed alters the hydrology and geomorphology of streams; resulting in increased loadings of nutrients, sediment, and other contaminants to the stream (Paul and Meyer, 2001).

The Double Pipe Creek Watershed is estimated to have 3,897 acres of total impervious within the catchment and accounts for approximately 3.7 percent of the total land area. The impervious surface area within Double Pipe, by subwatershed can be found in Table 7 and is shown in Figure 3.

Table 7: Double Pipe Creek Watershed Estimated Impervious Surface Area

DNR 12-digit Scale	Subwatershed	Acres	Impervious Acres	Percent Impervious
0281	Bear Branch	9,158	308.81	3.4%
0282	Bear Branch	2,643	62.18	2.4%
0278	Big Pipe Creek	8,799	261.34	3.0%
0279	Big Pipe Creek	4,582	77.01	1.7%
0280	Big Pipe Creek	3,937	77.09	2.0%

Doub	le Pipe Creek Watershed	105,457	3,897	3.7%
0275	Turkeyfoot Run	3,833	131.31	3.4%
0285	Silver Run	6,212	156.26	2.5%
0269	Sams Creek	991	42.25	4.3%
0268	Sams Creek	5,393	178.31	3.3%
0273	Priestland/ Wolf Pit Branch	4,760	193.33	4.1%
0277	Meadow Branch	9,490	482.11	5.1%
0276	Little Pipe Creek	7,442	789.78	10.6%
0272	Little Pipe Creek	5,880	141.19	2.4%
0248	Double Pipe Creek	759	20.63	2.7%
0271	Dickenson Run	4,049	167.61	4.1%
0288	Deep Run	3,456	97.99	2.8%
0274	Cherry Branch/Ltl Pipe	3,452	77.79	2.3%
0287	Big Pipe Creek	1,796	36.21	2.0%
0286	Big Pipe Creek	6,074	266.68	4.4%
0284	Big Pipe Creek	5,568	110.99	2.0%
0283	Big Pipe Creek	7,183	217.99	3.0%

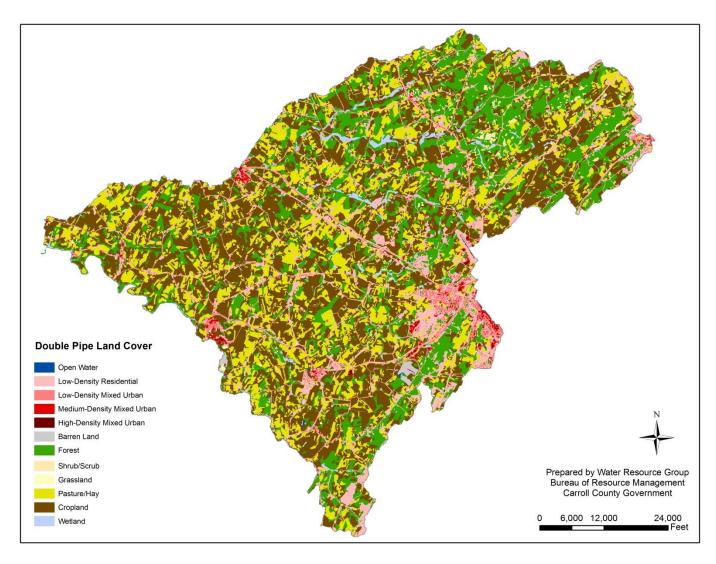


Figure 2: Double Pipe Creek Watershed Land Use/Land Cover from 2011

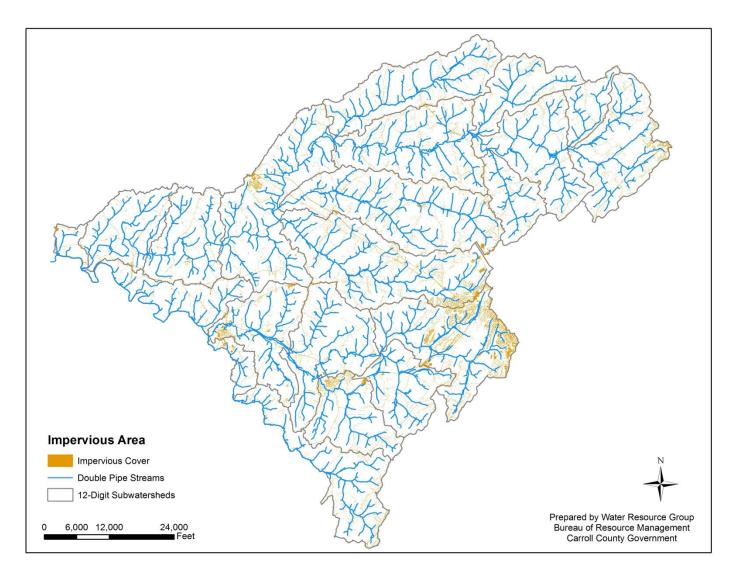


Figure 3: Double Pipe Creek Watershed Impervious Surface Area

C. Watershed Characterization

Following the Double Pipe Creek stream corridor assessment (SCA), completed in 2016, a Watershed Characterization for the Double Pipe Creek Watershed was completed. The characterization provides background on the natural and human characteristics of the watershed. The information provided in the characterization as well as information gathered during the Double Pipe Creek Watershed SCA will be used as the foundation for the watershed restoration plan. The Double Pipe Creek SCA and characterization documents can be found at:

http://ccgovernment.carr.org/ccg/resmgmt/DoublePipeCreek/Assessment.aspx

http://ccgovernment.carr.org/ccg/resmgmt/DoublePipeCreek/Character.aspx

1. Tier II Waters and Ecological Sensitive Areas

a. Tier II Waters

States are required by the federal Clean Water Act to develop policies, guidance, and implementation procedures to protect and maintain existing high quality waters and prevent them from degrading to the minimum allowable water quality. Tier II waters have chemical or biological characteristics that are significantly better than the minimum water quality requirements. All Tier II designations in Maryland are based on having healthy biological communities of fish and aquatic insects. Within the Double Pipe Creek Watershed, there are no sections designated as Tier II waters.

b. Ecologically Sensitive Areas

Targeted Ecological Areas (TEAs) are lands and watersheds of high ecological value that have been identified as conservation priorities by the Maryland Department of Natural Resources (DNR) for natural resource protection. These areas represent the most ecologically valuable areas in the State (imap.maryland.gov). Targeted ecological areas within the Double Pipe Creek Watershed are shown in Figure 4.

For watershed restoration purposes, it is important to know and account for the habitats of sensitive species. Protecting and expanding these habitats help to preserve biodiversity and is a critical component in successfully restoring a watershed. DNR's Wildlife and Heritage Service identifies important areas for sensitive species conservation known as "stronghold watersheds". Stronghold watersheds are the places where rare, threatened, and endangered species have the highest abundance of natural communities. A complete list of all rare, threatened, and endangered plants and animals within Carroll County and throughout the state of Maryland can be found at:

http://www.dnr.state.md.us/wildlife/espaa.asp.

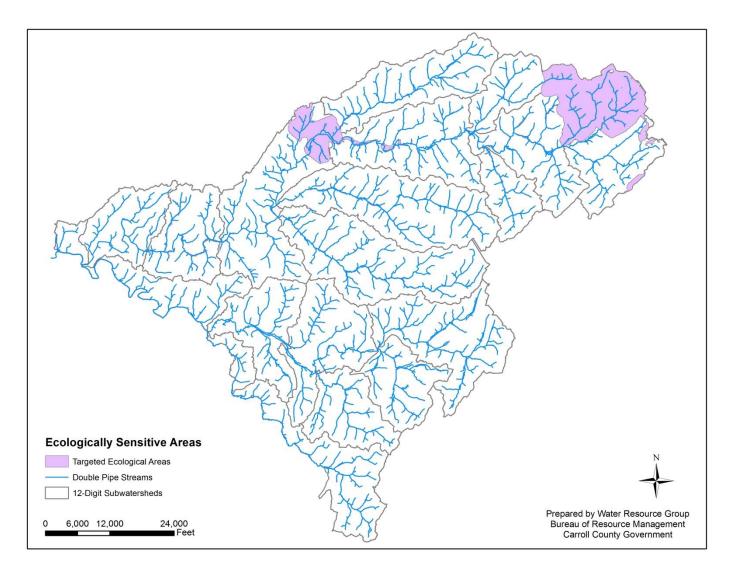


Figure 4: Targeted Ecological Areas

2. Stream Corridor Assessment (SCA)

A Stream Corridor Assessment (SCA) of the Double Pipe Creek Watershed was conducted during the winter of 2016 by Carroll County Bureau of Resource Management staff. The Double Pipe Creek SCA was based on protocols developed by the Maryland Department of Natural Resources watershed restoration division (Yetman, 2001). The goal of this assessment was to identify and rank current impairments within the watershed to assist in prioritizing locations for restoration implementation. A summary of the entire Double Pipe Creek SCA is available at:

http://ccgovernment.carr.org/ccg/resmgmt/DoublePipeCreek/Assessment.aspx

3. Priority Watersheds

During the SCA, field crews identified erosion problems along approximately 211,310 linear feet of the corridor, 23.72% of the overall stream miles that were granted permission to assess. The highest percent of erosion based on the stream miles assessed were in Big Pipe Creek (0286), Little Pipe Creek (0272), Meadow Branch (0277), and Little Pipe Creek (0276). A significant portion of the drainage within Little Pipe Creek (0272), Meadow Branch (0277), and Little Pipe Creek (0276) sub-watersheds originates within the corporate limits of Westminster, whereas, the Big Pipe Creek subwatershed (0286) originates within the corporate limits of Manchester. Table 8 lists the total stream miles in each subwatershed, the amount of stream miles that were granted permission to assess within each subwatershed, as well as the total linear foot of erosion identified in each subwatershed, and what percent of the streams within each watershed were eroded based on the miles assessed.

Priority for restoration projects will be based on; the amount of impervious area in need of treatment and will focus on areas that will address significant downstream erosion that reduces nutrient and sediment loadings.

Table 8: Subwatershed Erosion Statistics

Stream Segment	12-Digit Stream Miles	Stream Miles Assessed (granted permission)	Erosion (Linear Ft.)	Percent of Erosion Within Assessed Corridor
Bear Branch (021403040281)	45.68	14.01	6,350	8.59%
Bear Branch (021403040282)	11.33	5.32	7,225	25.73%
Big Pipe Creek (021403040278)	45.71	9.10	10,250	21.34%
Big Pipe Creek (021403040279)	25.30	5.66	3,000	10.03%
Big Pipe Creek (021403040280)	20.57	8.59	10,350	22.82%
Big Pipe Creek (021403040283)	32.82	3.24	3,800	22.25%
Big Pipe Creek (021403040284)	27.25	10.82	13,720	24.01%
Big Pipe Creek (021403040286)	23.86	3.56	7,950	42.34%
Big Pipe Creek (021403040287)	10.04	0.00	N/A	N/A
Cherry Branch/Little Pipe Creek (021403040274)	22.98	7.34	8,400	21.66%
Deep Run (021403040288)	15.45	2.99	4,490	28.46%
Dickenson Run (021403040271)	18.77	8.90	10,750	22.88%
Double Pipe (021403040248)	4.84	0.99	1,300	24.89%
Little Pipe Creek (021403040272)	29.06	12.18	25,050	38.94%
Little Pipe Creek (021403040276)	33.28	19.31	30,240	29.66%
Meadow Branch (021403040277)	43.38	20.43	34,145	31.65%
Priestland Branch/Wolf Pit Creek (021403040273)	22.19	3.76	4,500	22.69%
Sams Creek (021403040268)	29.83	16.56	22,565	25.81%
Sams Creek (021403040269)	5.69	1.27	0	0.00%
Silver Run (021403040285)	27.43	3.40	1,600	8.90%
Turkeyfoot Run (021403040275)	18.47	11.30	5,625	9.43%
Total	513.93	168.72	211,310	23.72%

III. New Development

A. Build-Out Analysis

Buildable Land Inventory (BLI) analyzes the number of residential lots that could be created, or single-family units constructed. The BLI is estimated based on the jurisdiction's current zoning and/or proposed future zoning (called "land use designation"). The BLI looks at existing development and, based on a yield calculation, determines how many more residential units can be built in the future. The BLI model does not include commercial or industrial development potential, but does contain information on land zoned and designated for these uses. Within the Double Pipe Creek Watershed there are 2,695 parcels remaining with potential development on 39,244 acres for an estimated lot yield of 8,343 (build out data was provided by the GIS group of Carroll County's Department of Land and Resource Management). This data is based on a medium range buildable land inventory estimate by land use designations. The medium range estimates have been determined to be the most accurate for build out. The full buildable land inventory report can be found at: http://ccgovernment.carr.org/ccg/compplanning/BLI/. Figure 5 shows the remaining parcels in Double Pipe Creek watershed where residential units could be built.

In addition to the BLI, the Carroll County Department of Land and Resource Management, Bureau of Development Review oversees the division of land and lot yield potential for properties in Carroll County. A parcel's potential lot yield is dependent on its size, the zoning district, the history of the property and whether or not it has in-fee frontage on a publically maintained road. The development and subdivision of land is regulated under Carroll County Code Chapter 155, and the Zoning Regulations are regulated under Carroll County Code Chapter 158.

B. Stormwater Management

Stormwater runoff associated with new development is addressed through Chapter 151 of the Carroll County Code of Public Local Laws and Ordinances. The purpose of this chapter is to protect, maintain, and enhance the public health, safety, and general welfare by establishing minimum requirements and procedures to control the adverse impacts associated with increased stormwater runoff.

The goal of Chapter 151 is to manage stormwater by using environmental site design (ESD) to the maximum extent practicable (MEP) to maintain after development as nearly as possible, the predevelopment runoff characteristics, and to reduce stream channel erosion, pollution, and sedimentation, and use appropriate structural BMPs only when necessary. Implementation of Chapter 151 will help restore, enhance, and maintain the physical, chemical, and biological integrity of streams, minimize damage to public and private property, and reduce impacts of land development.

The current chapter was adopted in 2010 and was written to adopt the State of Maryland revisions to the design manual (MD Code, Environmental Article, Title 4, Subtitle 2), which mandated the use of non-structural ESD practices statewide to the MEP to mimic totally undeveloped hydrologic conditions.

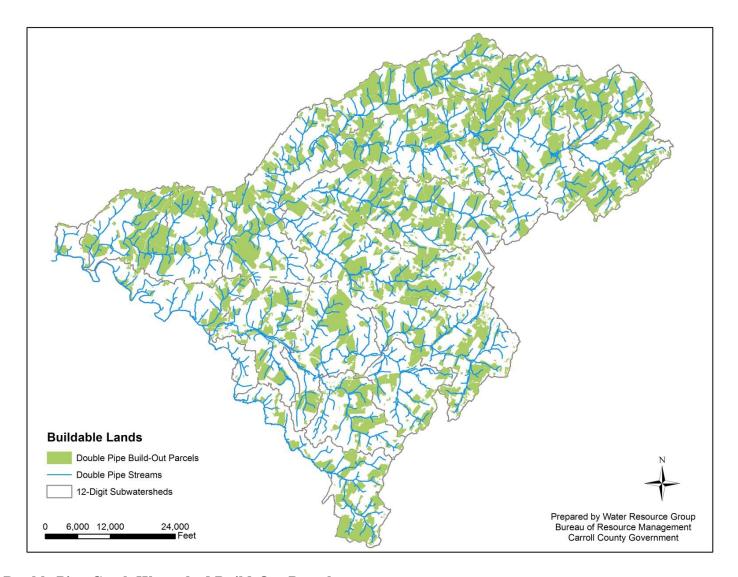


Figure 5: Double Pipe Creek Watershed Build-Out Parcels

C. County Easements

As part of the development process, Carroll County protects waterways and floodplains with perpetual easements to minimize the potential for impacts during and after construction to these sources. The purpose of the Carroll County Water Resource code (Chapter 154) is to protect and maintain ground and surface water resources of the County by establishing minimum requirements for their protection. Chapter 153 provides a unified, comprehensive approach to floodplain management. Floodplains are an important asset as they perform vital natural functions such as; temporary storage of floodwaters, moderation of peak flood flows, maintenance of water quality, and prevention of erosion. Many of these easements overlap with Forest Conservation Easements, which are required through State regulation. Appendix B lists the Water Resource Protection easements (182.31 acres), and Floodplain Protection Easements (62.61 acres) that have been preserved, and do not overlap with Forest Conservation requirements. These perpetually protected easements limit landowner use of environmentally sensitive areas and reduce the amount of nutrients entering the waterway. The location of Water Resource and Floodplain protection easements within the Double Pipe Creek Watershed can be found in Figure 6.

D. Rural Legacy Areas

Maryland's Rural Legacy Program was created in 1997 to protect large, continuous tracts of land from sprawl development and to enhance natural resource, agricultural, forestry and environmental protection through cooperative efforts among state and local governments and land trusts. http://www.dnr.state.md.us/land/rurallegacy/index.asp

The goals of the Rural Legacy Program are to:

- Establish greenbelts of forests and farms around rural communities in order to preserve their cultural heritage and sense of place;
- Preserve critical habitat for native plant and wildlife species;
- Support natural resource economies such as farming, forestry, tourism, and outdoor recreation, and;
- Protect riparian forests, wetlands, and greenways to buffer the Chesapeake Bay and its tributaries from pollution run-off.

The Double Pipe Creek Watershed lies within the Little Pipe Creek Rural Legacy Area and encompasses 34,237 acres (32%) of the Double Pipe watershed. The extent of the Rural Legacy Area within Double Pipe can be found in Figure 7.

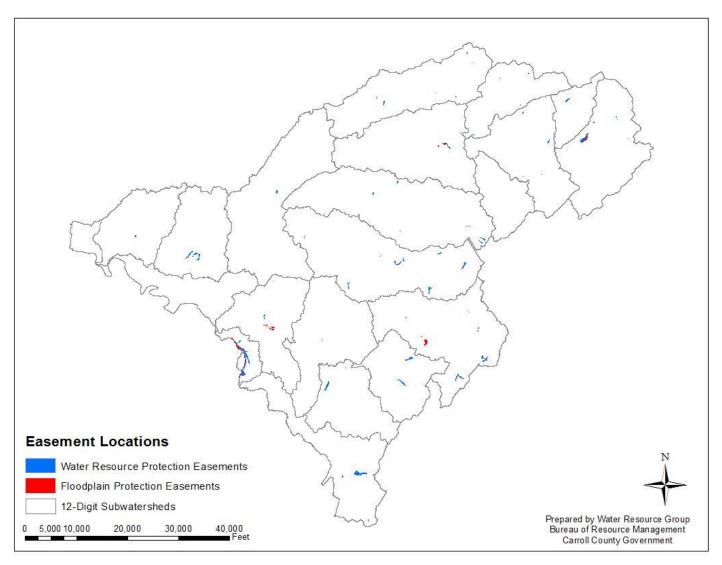


Figure 6: Water Resource and Floodplain Protection Easement Locations

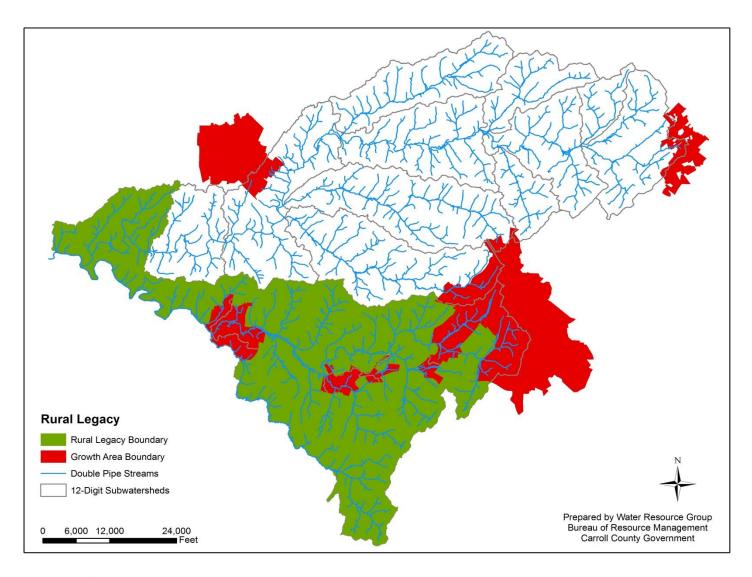


Figure 7: Little Pipe Creek Rural Legacy Area

IV. Public Outreach and Education

An informed community is crucial to the success of any stormwater management program (US EPA, 2005). The benefits of public education are unmeasurable; the National Environmental Education & Training Foundation (NEETF) found that 78 percent of the American public does not understand that runoff from impervious surfaces, lawns, and agricultural lands, is now the most common source of water pollution (Coyle, 2005). Throughout the year, County staff regularly hosts or participates in events to help inform the public of the importance of stormwater management.

A. Water Resources Coordination Council

The Water Resources Coordination Council (WRCC) was formed by the County Commissioners, eight municipalities, and the Carroll County Health Department in February of 2007 through a cooperative partnership and by formal joint resolution to discuss and address issues related to water resources. The monthly meetings, composed of representatives from the eight municipalities, the County, and the Carroll County Health Department provide an excellent opportunity to discuss pertinent issues related to water, wastewater, and stormwater management.

WRCC took the lead in coordinating and developing a joint Water Resources Element (WRE), which was adopted by the County and seven municipalities. The WRCC also serves as the local Watershed Implementation Plan (WIP) team for development and implementation of Maryland's Phase III WIP and continues to address WIP related issues and tasks as they arise.

In FY 2013 and FY 2014, the WRCC collaborated to develop, sign, and implement a Memorandum of Agreement (MOA) to implement NPDES permit requirements with specific provisions to cost-share the capital costs of meeting the municipalities' stormwater mitigation requirements. The WRCC will act as the forum for setting project priorities, and the County will continue to provide administrative and operating support services for the stormwater mitigation program.

1. Carroll County NPDES MS4 Team

The NPDES team was formed following the issuance of the County's most recent MS4 permit, which became effective on December 29, 2014. The team meets on a quarterly basis to discuss goals and deadlines related to NPDES MS4 discharge permit compliance. The team consists of personnel from the Department of Land and Resource Management; administration, water resources, stormwater, grading, engineering, and compliance.

B. Environmental Advisory Council (EAC)

The Environmental Advisory Council (EAC) is currently the mechanism in which the County continues to provide an open forum on environmental issues and concerns. This Commissioner-appointed citizen board holds monthly meetings, which are open to the public. The EAC functions at the direction of the Carroll County Board of Commissioners; works cooperatively with County environmental staff to research environmental policy issues, advises the Board of County Commissioners on environmental issues, fosters environmental education, and generally acts in the best interest of County residents by promoting effective environmental protection and management principles. EAC has been regularly briefed on NPDES permit specifics and implementation.

1. Community Outreach

In its role to promote environmental awareness and outreach, every other year, the EAC accepts nominations for Environmental Awareness Awards. Winners are recognized in a joint ceremony with the Board of County Commissioners, in the press, and on the EAC's website.

Since 2014, the EAC annually prepares a Carroll County Environmental Stewardship booklet, which is made available on the website, as well as various other venues. The booklet describes various efforts and initiatives undertaken by the County to demonstrate environmental stewardship and protection, including stormwater mitigation, management projects, and progress.

C. Public Outreach Plan

The public outreach plan provides a holistic review of the public outreach opportunities currently provided and available to residents and businesses in Carroll County and its eight municipalities. The goal of the public outreach plan is to raise public awareness and encourage residents and businesses to take measures to reduce and prevent stormwater pollution.

Public outreach efforts will focus on the issues and topics prescribed in the County's MS4 permit. The permit requires outreach to County and municipal staff, general public, and the regulated community. Emphasis will be given to facilities and businesses at a higher risk for stormwater pollution or potential illicit discharges, as well as homeowner associations and school students.

D. Educational Venues

County staff is continuously involved in environmental education efforts such as regularly speaking at schools, community organizations, club meetings, and other venues in an effort to ensure that key environmental information is available to the community. An information booth is set up at events sponsored by the Towns and County providing citizens with informational materials relating to homeowner stewardship, restoration efforts throughout the County, and an opportunity to volunteer in these efforts. Educational

events that County staff have participated in that are either held within the Double Pipe Creek Watershed or offered to citizens countywide can be found in Table 9.

Table 9: MS4 Public Outreach Events

Event	Year	Watershed	
12SW/SR Permittee Workshop	2018	Countywide	
Agricultural Tire Amnesty Program	2016	Countywide	
Annual Backyard Buffers Education Day	2017, 2018, 2019	Countywide	
Arbor Day Tree Planting Ceremony	2016	Countywide	
America Recycles Day	2017, 2018	Countywide	
Carroll Arts Council Festival of Wreaths	2015, 2017, 2018	Countywide	
Carroll County 4H Fair	2015, 2016	Countywide	
Carroll County NPDES MS4 Permit Annual Stormwater Pollution Prevention Compliance Training	2015, 2016, 2017, 2018	Countywide	
Carroll County Employee Appreciation Day	2016, 2017, 2018, 2019	Countywide	
Carroll County Envirothon	2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019	Countywide	
Carroll County Home Show	2016, 2017, 2018, 2019	Countywide	
Carroll County Household Hazardous Waste Fall Clean-Up	2016, 2017, 2018, 2019	Countywide	
Carroll County Seniors on the Go Expo	2016, 2017, 2018, 2019	Countywide	
Charlotte's Quest Nature Center Spring Fest	2018, 2019	Double Pipe/Prettyboy/Liberty	
Chesapeake Bay Awareness Week Stormwater Tour	2017	Countywide	
Choose Clean Water Coalition NPDES MS4 Tour	2018	Countywide	
Earth Day Celebration	2014, 2015, 2016, 2017, 2018, 2019	Countywide	
Environmental Advisory Council	2014, 2015, 2016, 2017, 2018, 2019	Countywide	
Environmental Awareness Awards Presentation	2016	Countywide	
Hampstead Fall Fest	2016, 2017, 2018	8 Countywide	

Hampstead-Manchester Business & Community Expo	2017, 2018, 2019	Countywide	
Homeowners & Stormwater Workshop	2017	Countywide	
Longwell Run Earth Day Celebration & Tree Planting	2018	Double Pipe	
McDaniel Clean-up Day	2018	Double Pipe	
Mid-Atlantic Car Wash Association "Wash to Save the Bay"	2019	Countywide	
National Night Out	2014, 2015, 2016, 2017, 2018	Countywide	
New Windsor Town Beautification Day	2018	Double Pipe	
Rain Barrel & Composting Event	2015, 2016, 2017, 2018, 2019	Countywide	
Scrap Tire Drop Off Day	2019	Countywide	
Town Mall Earth Day Event	2016	Countywide	
Westminster FallFest	2015, 2016, 2017, 2018	Countywide	
Westminster Flower & Jazz Festival	2017, 2018, 2019	Countywide	
Workshop: Businesses for Clean Water	2016	Countywide	

The County continues to expand their education and outreach efforts within all watersheds, and always looks for additional opportunities to engage the public with water resource related issues.

V. Restoration Implementation

The following describes the BMPs and restoration projects that have been either completed or proposed to meet the local TMDL requirements for the Double Pipe Creek Watershed. Appendix A also provides a complete list of restoration activities, their associated reduction values, subwatershed location, project status, project cost and anticipated completion date.

A. Stormwater Management Facilities

When runoff from precipitation flows over impervious surfaces it can accumulate various debris, chemicals, sediment, or other pollutants that could adversely affect the water quality of a stream. If not controlled, there is a high potential for stream degradation. This is due not only to pollutants that are carried directly into the water, but also the volume and velocity of the water that physically cuts away the stream bank, which results in habitat degradation and sediment mobilization.

The State of Maryland began requiring stormwater management in the mid 1980's for new development to manage the quantity of runoff. These requirements were initially established for any subdivision with lots of less than 2 acres in size. For lots greater than 2 acres, stormwater management was only required to address road runoff. In 2000, Maryland Department of Environment (MDE) released a new design manual for stormwater (MDE, 2000). The new manual required greater water quality and quantity controls and included stormwater management for subdivisions with lots greater than 2 acres. The manual was then revised in 2009 to reflect the use of environmental site design (ESD) practices.

Chapter 151 of the Carroll County Code was adopted pursuant to the Environmental Article, Title 4, Subtitle 2 of the Annotated Code of Maryland. Municipalities in Carroll County have either delegated authority to implement Chapter 151, or have their own code to administer stormwater management. These codes apply to all development and establish minimum requirements to control the adverse impacts associated with increased stormwater runoff.

Properly designed and maintained stormwater ponds will help improve their performance (Clary et al. 2010; US EPA 2012). In 2007, the Department of Public Works provided BRM with a County-wide list of SWM facilities owned by the County which had issues relating to maintenance (i.e. no available easements for accessing the property, slopes too steep to mow, trees too large to remove, etc.) After reviewing the list, BRM performed a GIS exercise to determine the drainage areas and impervious acres associated with these facilities. Field investigations were performed to determine the existing conditions of the facilities and if additional drainage could be diverted into the facilities for treatment. A stormwater management facility retrofit program, which included a project schedule, was then established based on projected costs associated with the retrofits, outstanding compliance issues, and funding available in fiscal years 2008 thru 2013. This process and the SCA(s) have aided BRM in establishing projects to date for the program.

The facilities proposed for implementation to assist in addressing the Double Pipe Creek Watershed TMDL's, that have been either completed or planned in current budget, are listed in Table 10. The location of each facility can be found in Figure 8, the practice type and runoff depth treated for each facility can be found in Appendix B.

Table 10: Proposed Stormwater Management Projects

Project Name	Drainage Area	Impervious Area	Project Type	Implementation Status	Subwatershed
Sunnyside	30.2	2.69	Facility	Completed	0284
Friendship Overlook	82.01	15.88	Retrofit	Completed	0276
Farm Museum	6.44	0.45	Facility	Completed	0276
Farm Museum 1	11.61	2.3	Facility	Completed	0276
Farm Museum 2	0.09	0.05	Facility	Completed	0276
Farm Museum 3	0.79	0.06	Retrofit	Completed	0276
Farm Museum 4	0.03	0.03	Facility	Completed	0276
Farm Museum 5	0.01	0.01	Facility	Completed	0276
CC Maintenance	45.49	25.05	Retrofit	Completed	0281
Langdon	194	92.1	Facility	Under Construction	0276
Blue Ridge Manor	36.28	9.26	Retrofit	Completed	0271
Locust Wetland	35.9	11	Facility	Planned	0273
CC Health Dept.	14.77	6.72	Facility	Planned	0276
Long Valley Rd	98.32	16.64	Facility	Planned	0276
Exceptional Center	46.5	14.7	Retrofit	Completed	0276
Elmer Wolfe	9.78	4.26	Retrofit	Planned	0273
NW RR Track	34.5	15.34	Facility	Planned	0271
Avondale Run Phase 2	7,86	1.84	Retrofit	Planned	0276
CC Airport	38.4	7.4	Retrofit	Planned	0281
Greens of Westminster Sec 6 #2	41	15.6	Retrofit	Planned	0277
Meadow Ridge 171	22.1	5.73	Retrofit	Planned	0277
Meadow Ridge 172	18.2	5.35	Retrofit	Planned	0277
Totals:	774.28	252.46			

B. Storm Drain Outfalls

During the Double Pipe Creek Watershed SCA in 2016, erosion sites were documented and rated on severity. SCA identified erosion sites were analyzed in GIS to the location of existing stormwater management facilities and identified any gaps in the storm drain network that were then further investigated in the field. Storm drain outfalls that have no stormwater controls or where stormwater management is not up to current standards have been identified as possible locations where stormwater practices could be implemented as a way to reduce erosive flows and consequently allow for natural regeneration of vegetation to occur within the stream corridors.

C. Rain Gardens

Most elementary schools within Carroll County have planted a rain garden as part of the Science, Technology, Engineering, and Mathematics (STEM) program. Rain gardens are shallow depressions that assist with treating stormwater by using native plants to soak up and filter runoff from the surrounding impervious surfaces. Four elementary schools within the Double Pipe Creek Watershed have planted four gardens with a total drainage area of 1.47 Acres.



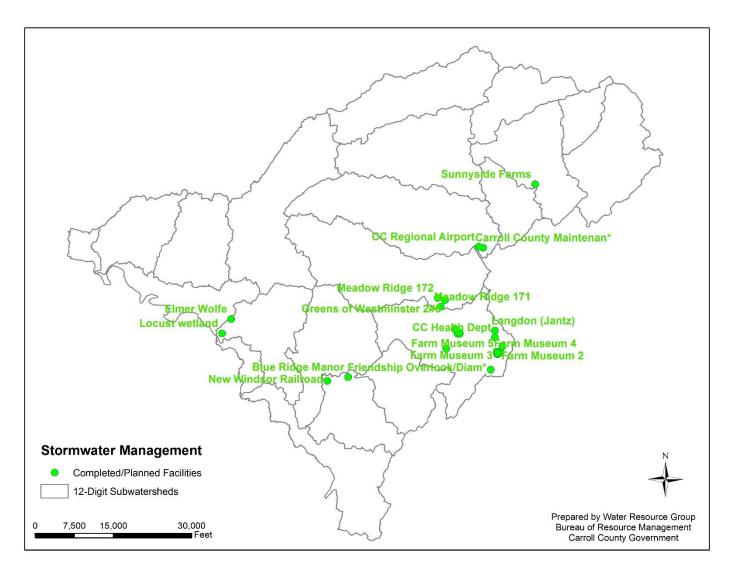


Figure 8: Stormwater Management Locations

D. Tree Planting and Reforestation

Stream buffers are vegetated areas along streams that reduce erosion, sedimentation and pollution of water (US EPA 2012a). Following the completion of the 2011 SCA in the Prettyboy Watershed, the BRM began a stream buffer initiative. This initiative is completely voluntary to landowners with a goal of re-establishing forested corridors along as many streams as possible.

1. Residential Buffer Plantings

The 2016 Double Pipe Creek SCA determined that approximately twenty five (25) percent of stream miles walked were inadequately buffered. In an effort to address inadequately buffered streams, letters were mailed to landowners whose properties were identified as having an inadequate buffer. This letter provided education on the importance of stream buffers and offered grant-assisted buffer plantings at no cost to the homeowner. Twenty six properties participated in this initiative during the spring and fall of 2014 and 2015. The acreage planted for each location and the associated subwatershed can be found in Table 11. The approximate locations of the residential buffer plantings are shown in Figure 9.

Table 11: Stream Buffer Plantings (Municipal/Residential)

	Acres Planted	Buffer Length	Buffer Width	12- Digit Subwatershed	Date Planted
Planting 1	4.13	1,115	225	0274	2013
Planting 2	10.85	4,325	125	0276	2013
Planting 3	0.2	450	20	0273	Spring 2015
Planting 4	1.4	750	50	0272	Spring 2015
Planting 5	0.5	435	30	0283	Spring 2015
Planting 6	0.3	340	40	0286	Spring 2015
Planting 7	0.65	562	50	0277	Spring 2015
Planting 8	2.3	250	200	0285	Spring 2015
Planting 9	0.4	150	50	0281	Spring 2015
Planting 10	2.25	900	50	0286	Spring 2015
Planting 11	0.2	430	10	0283	Spring 2015
Planting 12	0.62	360	50	0286	Spring 2015
Planting 13	1.8	1,600	20	0277	Spring 2015
Planting 14	0.9	310	160	0287	Spring 2015
Planting 15	0.26	200	50	0273	Fall 2015
Planting 16	3	800	300	0285	Fall 2015
Planting 17	9	800	275	0273	Fall 2015
Planting 18	0.13	220	25	0281	Fall 2015

Planting 19	0.6	1,000	20	0272	Fall 2015
Planting 20	0.2	450	25	0285	Fall 2015
Planting 21	1.25	300	50	0272	Fall 2015
Planting 22	0.45	225	75	0278	Fall 2015
Planting 23	2.2	1,150	60	0271	Fall 2015
Planting 24	1.62	200	200	0276	Fall 2015
Planting 25	4.26	1,000	125	0276	Fall 2015
Planting 26	1.8	250	150	0276	Fall 2015

a. Monitoring Schedule & Implementation Assurance

Plantings implemented through the Bureau's stream buffer initiative include a maintenance term, which consists of mowing, stake repair, and shelter maintenance. Successful plantings require the survival of 100 trees per acre. Each planting will be inspected biannually for ten years to ensure the success of the program, and once every three years after the ten year period. In addition, the homeowners have signed agreements to ensure that the planting areas are maintained and protected.

2. Municipal Plantings

In addition to the implementation of residential stream buffer plantings, in 2015, the Towns of New Windsor, Union Bridge and the City of Westminster also initiated tree planting projects within the Double Pipe Creek Watershed.

The City of Westminster implemented tree planting projects at three locations that consisted of planting over 2,300 trees to reforest more than 7.5 acres. The Town of New Windsor project consisted of planting 570 trees at a stocking rate of 260 trees per acre to restore a forested buffer along 1,150 feet of stream that is currently leased as cropland. The Town of Union Bridge project involved reforesting over 1,000 feet of stream corridor with over 1,200 trees just north of town in a wellhead protection area.

The Municipal efforts are included in Table 10 above.

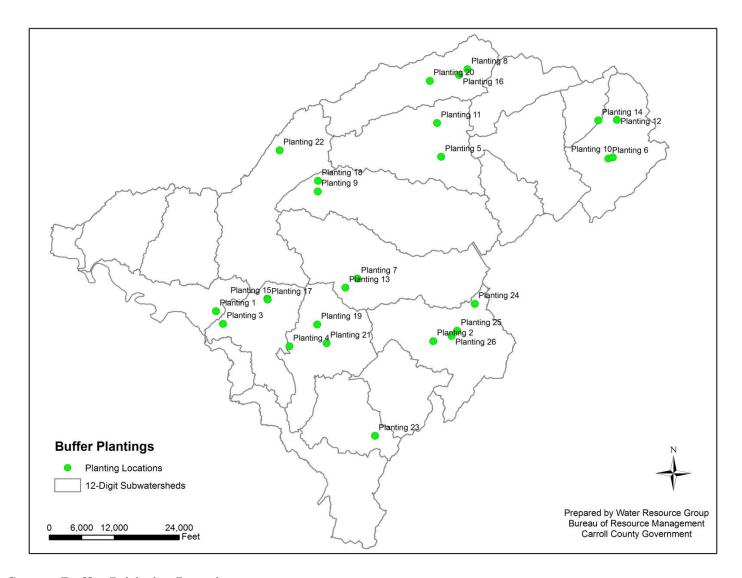


Figure 9: Stream Buffer Initiative Locations

E. Stream Restoration

Streams are dynamic systems that adjust to tectonic, climatic and environmental changes imposed upon them (Dollar, 2000). A stream system adjusts in order to maintain a steady state, or dynamic equilibrium between the driving mechanisms of flow and sediment transport and the resisting forces of bed and bank stability and resistance to flow (Soar et al., 2001).

Historic land use and more recently, urbanization, has deteriorated the quality of streams within the Piedmont. Booth and Henshaw (2001) documented the increase of sediment yield and channel erosion within urbanizing streams, and research has shown that sediment yields in urban streams are more than an order of magnitude higher when compared to rural streams (Langland and Cronin, 2003).

The County has considered the implementation of stream restoration practices as a method to potentially reduce nutrient and sediment loadings within the watershed.

F. Streambank Regeneration

Accelerated streambank erosion occurs downstream of inadequately managed impervious from development. The proportion of rain water that previously infiltrated into the ground is reduced. Thus, causing immediate runoff, and increasing the total amount and velocity of flow in the receiving channel, accelerating erosion and resulting in greater sediment loads within the stream corridor.

There are two effective ways to reduce the destabilizing velocity increases in the receiving channel. The first is traditional stream restoration, increasing the plan form and bank resistance. The second is upland stormwater management, storing the total runoff volume and dissipating the acquired kinetic energy as turbulence in the water pool.

In the Piedmont, many residential, institutional, or commercial areas were developed prior to 1982 without any stormwater management or subsequently with peak flow control that matched existing conditions only, not really returning the runoff characteristics to predevelopment, as required by COMAR 26.17.02.01. Matching the existing hydrologic runoff response in these areas does not address existing streambank instability and does nothing to help restore streams or reduce current nutrient and legacy sediment export to the Bay.

Carroll County has been experimenting with the use of enlarged, enhanced, sand filters as primary stormwater management for more than 10 years. In an effort to determine the cause of these unanticipated stormwater management/quality/stream restoration benefits, we reanalyzed the design information. This showed that the Carroll County standard design reduced the two-year storm peak flow below that of an equivalent forested watershed in good condition. This has always been the goal of stormwater management, returning the hydrologic condition to that assumed to exist in pre-contact times.

Since the two-year flow is thought to control bank geometry, it makes sense that this would be an unintended benefit of truly adequate stormwater management. How far downstream the effect extends is site specific and depends on the soil types and land uses in the unmanaged portion of the watershed below the sand filter.

Although streambank regeneration is not currently an approved practice in the 2014 MDE guidance document (MDE, 2014), the guidance states that innovative practices that are not approved under the Maryland Stormwater Design Manual (MDE, 2000) nor have an MDE or CBP assigned pollution removal efficiency can be used to offer jurisdictions additional options toward watershed restoration activities provided that there is proper documentation and monitoring to verify pollutant removal efficiencies acceptable to MDE. The County has developed a paired watershed approach to evaluate the effectiveness of upland stormwater management practices on stream channel protection and will begin a 3-year study in 2016 collecting the necessary data to document the sediment and nutrient reduction benefits associated with this practice. The results will inform recommendations to credit upland stormwater practices as a hydrogeomorphic stream stabilization technique for sediment reductions.

G. Road Maintenance Projects

County and Municipal road crews perform regular maintenance to infrastructure such as; inlet cleaning, street sweeping, storm drain cleaning, and removal of impervious surfaces. Accounting for the number of inlets cleaned or the tons of debris removed provides an accurate measurement of how these particular practices reduce loadings within the watershed.

Street sweeping, using either mechanical or vacuum-assisted equipment will remove buildup of pollutants that have been deposited along the street or curb, whereas, the removal of impervious surfaces will improve water quality by changing the hydrologic conditions within the watershed. Road maintenance projects completed within the Double Pipe Creek Watershed are shown in Table 12.

Table 12: Road Maintenance Projects

Management Practice	Inlet Cleaning				
Town	Tons Removed	12-Digit Watershed	Date of Completion		
Manchester	0.42	0286	Annual		
New Windsor	0.08	0271/0272	Annual		
Union Bridge	0.72	0273	Annual		
Westminster	0.44	0276/0277	Annual		
Management Practice	Bi-Weekly Mechanical Street Sweeping				
Town	# Acres Swept	12-Digit Watershed	Date of Completion		
Westminster	7.62	0276	Annual		

H. Septic Systems

With the decline in water quality to the Chesapeake Bay, Senate Bill 320, Bay Restoration Fund, was signed into law in May of 2004. The purpose of the Bay Restoration Fund (BRF) was to address a major contributor of nutrients to the Bay such as effluent discharge, by creating a dedicated fund to upgrade Maryland's wastewater treatment plants with enhanced nutrient removal (ENR) technology to improve wastewater effluent quality. A portion of the BRF also collects fees from septic system users that will be utilized to upgrade on-site disposal systems (OSDS) to best available technology (BAT) as the drainage from failed septic systems may make its way through the drain field and eventually into local waters (Clary, et al. 2008). New septic systems, repairs, and replacements are tracked through the County Health Department.

Nutrient loads from failing septic systems are not part of the MS4 load reduction requirements for the County or Towns. However, upgrading septic systems or connecting houses to a sanitary sewer system will help the overall achievability of the TMDLs. Since 2009, twenty (43) septic systems within the Double Pipe Creek Watershed have been repaired and seventeen (35) new systems have been built utilizing Best Available Technology (BAT). Fourteen (33) of these projects have been via the Bay Restoration Fund. BAT has been proven to be effective at nitrogen removal but has not been shown to reduce Phosphorus. Any reductions to bacteria loading are also unknown at this time. Septic systems that have been built or repaired utilizing BAT within the Double Pipe Creek Watershed are listed in Appendix C.

I. Agricultural Best Management Practices (BMPs)

Agricultural BMPs are on-the-ground practices that help minimize runoff and delivery of pollutants into our waterways. Practices can be categorized as soft BMPs such as streambank fencing and cover cropping or hard BMPs like heavy use areas and waste storage structures. Long term waste storage structures allows for manure to be applied during appropriate weather conditions to reduce runoff and allows some bacteria to die off during the storage practice (Walker, et al. 1990).

Farm conservation and nutrient management plans consist of a combination of agronomic and engineered management practices that protect and properly utilize natural resources in order to prevent deterioration of the surrounding soil and water. A conservation plan is written for each individual operation and dictates management practices that are necessary to protect and improve soil and water quality. A nutrient management plan is a plan written for the operator to manage the amount, timing, and placement of nutrients in order to minimize nutrient loss to the surrounding bodies of water while maintaining optimum crop yield.

This document presents restoration strategies that are proposed to meet water quality standards for developed source types. Nutrient reductions for agronomic practices are not quantified or used as credit to meet TMDLs for developed land.

VI. Local TMDL Project Tracking, Reporting, Modeling and Monitoring

The restoration projects listed in this plan and any future projects progress towards meeting the stormwater WLA will be documented through a combination of modeling and BMP reductions calculated based on the 2014 Maryland Department of the Environment (MDE) guidance document entitled: *Accounting for Stormwater Wasteload Allocations and Impervious Acres Treated*, and all future guidance revisions. Project information will also be tracked through an Excel spreadsheet database. The database will track implementation data over time, such as drainage area, impervious area, runoff depth treated, project type, project location, inspection, maintenance, and performance. GIS will also be used to track the location of projects. Appendix A provides a complete list of restoration activities and project status. Appendix C provides the associated reduction values.

A. Data Reporting

Information derived from the baseline tracking and project monitoring will be updated and summarized in Appendix A of this document as needed. Implementation progress will also be included in the County's annual MS4 report, which will document the success to date of the plan in improving watershed conditions and progress towards meeting all applicable TMDL's as per section E.4 of the County's NPDES MS4 permit.

B. Modeling with Mapshed

The MapShed (version 1.3.0; MapShed, 2015) tool developed by Penn State University was utilized by the Bureau of Resource Management to document progress towards meeting the stormwater WLA. This modeling approach allowed for specific local data (streams, topology, and land use) to be used as the basis for TN, TP, and TSS reductions.

1. Model Description

MapShed is a customized GIS interface that is used to create input data for the enhanced version of the Generalized Watershed Loading Function (GWLF-E) watershed model. The MapShed tool uses hydrology, land cover, soils, topography, weather, pollutant discharges, and other critical environmental data to develop an input file for the GWLF-E model. The basic process when using MapShed is: 1) select an area of interest, 2) create GWLF-E model input files, 3) run the GWLF-E simulation model, and 4) view the output. The MapShed geospatial evaluator and the GWLF-E models have been used for TMDL studies in Pennsylvania (Betz & Evans, 2015), New York (Cadmus, 2009), and New England (Penn State, 2016). More information about model inputs and BMP assumptions can be found in Appendix D.

2. Restoration Progress: December 2019

Current restoration strategies outlined in this document are efforts initiated to meet Stormwater WLA TMDL requirements within the Double Pipe Creek Watershed. As described in Section I, bacteria, phosphorus and TSS loads within the watershed must be reduced in order to meet water quality standards.

The Maryland Department of the Environment (MDE) has provided a guidance document for NPDES – MS4 permits entitled: *Accounting for Stormwater Wasteload Allocations and Impervious Acres Treated*. The draft document was released in June 2011, followed by a final release in August 2014, and an updated version due out for review in the Fall of 2019.

The local TMDLs suggests an urban TP load reduction of 72.5% from the 2009 baseline year and TSS load reduction of 33.8% from the 2000 baseline year. The GWLF-E modeling approach used has a different accounting procedure than the Chesapeake Bay Watershed Model, as the inputs, the load estimation algorithms, and the end-points are different. As the focus of this effort is on local TMDLs, with the assumption that meeting local TMDLs will lead to meeting the Chesapeake Bay TMDL requirements, the end point is the waterbody of concern (i.e. Double Pipe Creek watershed). The GWLF-E model allowed for specific local GIS information (streams, topology, and land use) to be used as the basis for TN, TP, and TSS reductions while still maintaining the ability to estimate the relative urban TP load reductions of 72.5% and urban TSS load reductions of 33.8% of the local TMDL baseline years. A baseline year of 2011 was used as a proxy for the 2009 baseline year in the local TP TMDL, as land cover data from 2011 was the closest available for that time period. Similarly, a baseline year of 2001 was used as a proxy for the 2000 baseline year in the local TSS TMDL. The modeled baseline scenarios did not include any BMPs and therefore represent the land use loads with no treatment provided. Load reductions from BMPs installed after the 2009 TP TMDL and 2000 TSS TMDL baseline years can be counted toward load reductions necessary to meet the TMDLs, even though 2011 and 2001 were used as the baseline proxy years. For reference, the modeled baseline urban P load using the 2011 land cover was 938.00 lbs, which equates to a 72.5% reduction of 680.05 lbs. The modeled baseline urban TSS load using the 2001 land cover was 1290.91 tons, which equates to a 33.8% reduction of 432.95 tons (Table 13).

The projects completed as of December 2019 are providing 46.28 pounds of TP reduction, and 68.65 tons of TSS reduction. The planned projects would provide another 78.01 lbs. of TP reduction and another 42.91 tons of sediment (Table 14). These reductions are delivered (i.e. they include the GWLF-E estimated TN, TP, and TSS delivery ratios). Refer to Appendix C for the complete documentation of load reductions from different practice types.

The current progress of implemented and planned projects is shown in Figures 10 and 11. To achieve remaining TMDL requirements, the county will utilize the MapShed tool to assist in selecting a mix of techniques and practice types for locations identified in future Community Investment Program (CIP) budgets to progress towards fully attaining the Double Pipe Creek TMDLs. At this point it is not feasible, and is fiscally not possible to identify or specify the exact projects, locations, or costs beyond the current CIP.

It is likely that these projects will also reduce bacteria contributions to the watershed. However, MDE currently does not provide guidance on bacteria reduction efficiencies.

Table 13: Total Phosphorus and Total Suspended Sediment Load Reduction in the Double Pipe Creek Watershed in Carroll County.

	Total Phosphorus Load Reduction						
Modeled Baseline Load (lbs)	% Required Reduction from TMDL	Required Load Reduction based on Modeled Baseline (lbs)	Reduction from Current BMPs (lbs)	Reduction from Planned Strategies (lbs)	Total % Reduction Achieved		
938.00	72.5%	680.05	46.28	78.01	13%		
	Tota	l Suspended Sedim	ent Load Red	uction			
Modeled Baseline Load (tons)	% Required Reduction from TMDL	Required Load Reduction from from Current Modeled BMPs Reduction Reduction from Planned Total %					
1280.91	33.8%	432.95	68.65	42.91	8%		

Table 14: Comparison of Total Phosphorus and Total Suspended Sediment Delivered Load Reductions by Restoration Strategies. This table includes both proposed and existing BMPs.

	Total Phosphorus Delivered Load Reductions (lbs/yr)					
Status	Pond Retrofits	Buffers	Easements	Stream Restoration	Catch Basin/ Inlet Cleaning	
Completed	40.65	3.38	2.15		0.10	
Planned	25.2			52.82		
	Total S	Suspended Se	ediment Deliv	ered Load Reduc	tions (tons/yr)	
Completed	47.49	3.95	17.16		0.05	
Planned	33.84			9.07		

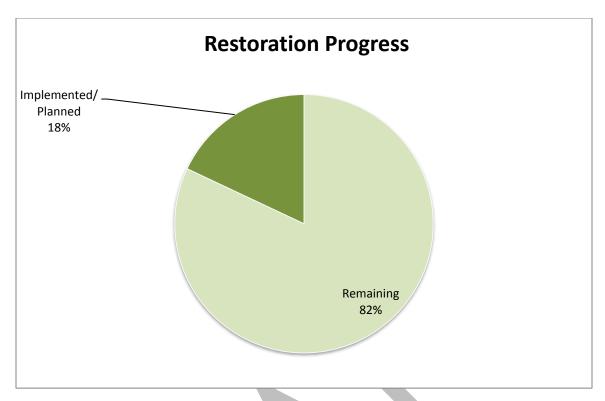


Figure 10: 2019 Restoration Progress Phosphorus

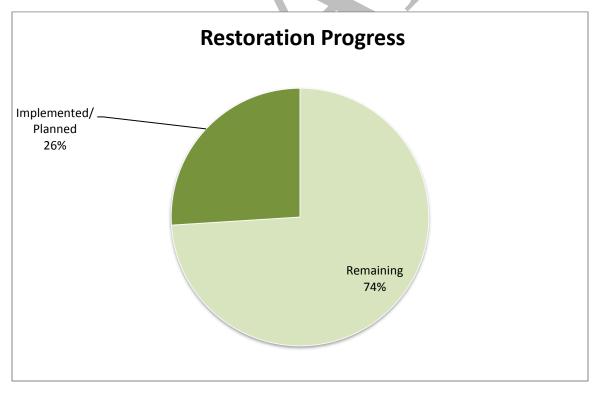


Figure 11: 2019 Restoration Progress Sediment

3. Bacteria Load Reduction

The bacteria TMDL is calculated and broken down into four main sources; human, domestic pet, livestock and wildlife. While the County recognizes a need for bacteria reductions across all sources, this plan will focus primarily on the reduction of human related sources associated with the SW WLA.

a. Human Source Elimination

Elimination of human sources of bacteria within the Double Pipe Creek Watershed will occur through continued implementation of measures by the County and the municipalities public works departments. Replacing or repairing failing infrastructure within the service area will reduce the infiltration and inflow (I&I) being treated at the facility.

Table 15 lists infrastructure related measures that have been implemented since the baseline year that would assist in reducing bacteria counts within the watershed.

Table 15: Waste Collection Infrastructure Upgrades

	County	Manchester	Westminster	Union Bridge	New Windsor
BAT Upgrades	78	0*	0*	0*	0*
Casings/Linings	n/a	TBD	TBD	TBD	TBD
Lateral line replacements	n/a	TBD	TBD	TBD	TBD
Pump Station upgrade	n/a	TBD	TBD	TBD	TBD

^{*}upgrades occurred within corporate boundaries

b. Domestic Pet Source Elimination

Bacteria contributions from domestic pets can potentially have a significant impact on receiving water bodies from runoff carrying waste into nearby streams. The County anticipates reductions from domestic pet sources to occur through education and outreach of the importance of eliminating this potential source.

c. Stormwater Source Elimination

It is likely that stormwater management projects will also reduce bacteria contributions within the watershed, particularly wet or failing facilities converted to surface sand filters. However, currently MDE does not provide guidance on bacteria reduction efficiencies or loading rates of bacteria by land use.

The County is focused on retrofitting older facilities to current standards, maintaining current facilities that will reduce and deter wildlife sources of bacteria from entering the County's MS4 network, as well as continuing to implement alternative practices such as street sweeping and inlet cleanings to minimize potential bacteria sources from entering the storm drain system.

C. Water Quality Monitoring

The County's current monitoring strategy is focused primarily around retrofit locations where reductions in loadings can be documented from the before and after study approach.

1. Retrofit Monitoring

The BRM currently monitors two locations within the Double Pipe Creek Watershed. The Farm Museum site, shown in Figure 12 is located within the Little Pipe Creek (0276) subwatershed just outside the corporate limits of the City of Westminster. The Greens of Westminster site, shown in Figure 13 is located within the Meadow Branch (0277) subwatershed and is entirely within the corporate limits of the City of Westminster.

The Farm Museum location is a public educational facility owned by the Carroll County Commissioners, with a drainage area of 23 acres, of which 4 acres, or 17% is impervious. The Greens of Westminster location has a drainage area of approximately 41 acres, of which, 15.6 acres or 38% is impervious.

Bi-weekly monitoring at the Farm Museum site began in February of 2015, while monitoring at the Greens of Westminster location started in December of 2017. Both sites involve the collection of chemical grab samples with corresponding discharge measurements in order to calculate loadings. The chemical monitoring parameters, methods, and detection limits for both sites can be found in Table 16.

Additional monitoring at these locations include spring macro-invertebrate collection, which are based upon protocols set by Maryland's MBSS program (Stranko et al, 2014).

Table 16: Water Quality Parameters and Methods

Parameter	Reporting Limit	Method	
Total Suspended Solids	1 mg/l	SM 2540 D-97	
Total Phosphorus	0.01 mg/l	SM 4500-P E-99	
Ortho Phosphorus	0.01 mg/l	SM 4500-P E-99	
Nitrate-Nitrite	0.05 mg/l	SM 4500-NO3 H00	
Total Kjeldahl Nitrogen	0.5 mg/l	SM 4500-NH3 C97	

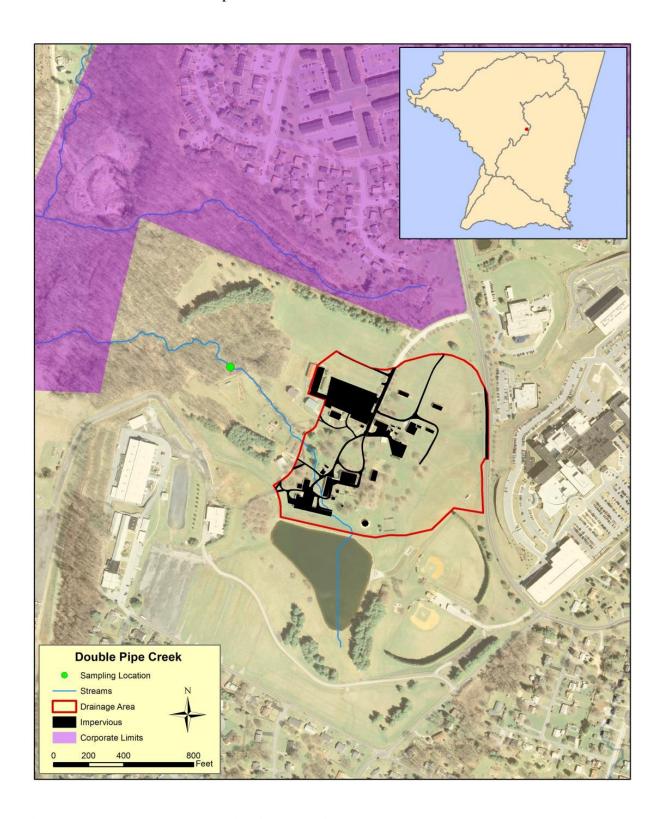


Figure 12: Farm Museum Monitoring Location



Figure 13: Greens of Westminster Monitoring Location

2. Bacteria Trend Monitoring

Carroll County's trend monitoring program is focused around showing long term trends of bacteria concentrations within the urbanized areas of Carroll County associated with the SW WLA. Monitoring within the Double Pipe Creek Watershed began in December of 2017 at two locations, shown in Figure 14. Monitoring was suspended during a project by the City of Westminster and will resume once concluded. Samples are collected on the 1st Thursday of each month by the County's Bureau of Resource Management.

a. Monitoring Results

Sample results are reported in MPN/100mL. Table 17 shows the monitoring results for the entire year, whereas Table 18 displays only seasonal data (May 1st to September 30th). Both the annual and seasonal table differentiate samples between low flows, high flows, as well as all flows combined, and are reported as geometric means. Geometric means that are below the 126 MPN/100mL water quality standard are highlighted in blue.

Table 17: Bacteria Monitoring Annual Data MPN/100mL

Flow		20	17	2018	
Location	Type	# Samples	MPN	# Samples	MPN
	Low	1	15	5	29
LPC03	High	0	n/a	0	n/a
	All	1	15	5	29
	Low	1	8	5	35
LPC06	High	0	n/a	0	n/a
	All	1	8	5	35

Table 18: Bacteria Monitoring Seasonal Data (May 1 – September 30) MPN/100mL

Location	Flow	20	17	2018	
Location	Type	# Samples	MPN	# Samples	MPN
	Low	0	n/a	1	43
LPC03	High	0	n/a	0	n/a
	All	0	n/a	1	43
	Low	0	n/a	1	56
LPC06	High	0	n/a	0	n/a
	All	0	n/a	1	56

In addition to geometric mean calculations, each individual sample was analyzed and compared to the single sample exceedance standards, as presented in Table 2 for full body contact. Table 19 shows the percentage of individual samples that exceeded the standards based on frequency of full body contact during the seasonal time period.

Table 19: Single Sample Exceedance Frequency

	MPN		20:	17	201	18
Location	Criteria	Flow Type	# Samples	% Exceeded	# Samples	% Exceeded
	576	Low	1	0%	5	0%
	5/6	High	n/a	n/a	n/a	n/a
	410	Low	1	0%	5	0%
LPC03	410	High	n/a	n/a	n/a	n/a
LFC03	209	Low	1	0%	5	0%
	298	High	n/a	n/a	n/a	n/a
	235	Low	1	0%	5	0%
	233	High	n/a	n/a	n/a	n/a
	576	Low	1	0%	5	0%
	370	High	n/a	n/a	n/a	n/a
	410	Low	1	0%	5	0%
LPC06	410	High	n/a	n/a	n/a	n/a
LFC00	298	Low	1	0%	5	0%
	290	High	n/a	n/a	n/a	n/a
	235	Low	1	0%	5	0%
	233	High	n/a	n/a	n/a	n/a

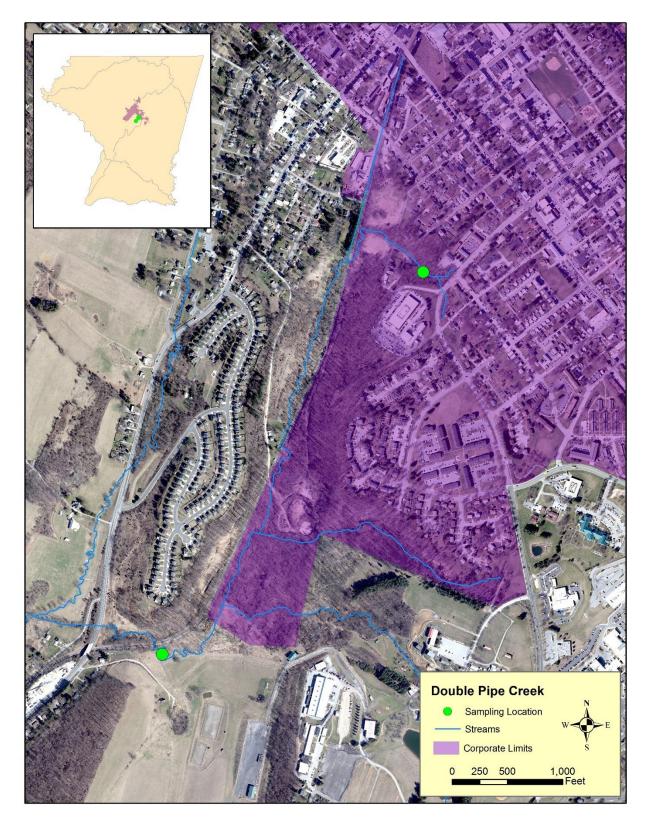


Figure 14: Bacteria Monitoring Location

VII. Chesapeake Bay Restoration

This section describes progress towards achieving the County's TMDL requirements associated with the stormwater WLA for the Chesapeake Bay watershed (Table 16). BMPs and restoration projects that have been either completed or proposed to address local TMDL's within the Double Pipe Creek Watershed will ultimately reduce loadings to the Chesapeake Bay.

A. River Segment Location

The Double Pipe Creek Watershed is located within the Potomac River segment of the Chesapeake Bay. The Potomac River segment within Maryland covers 1,539,973 acres, approximately 137,878 acres (9%) of this river segment is within Carroll County. The location of the Potomac River segment is shown in Figure 15.

B. Restoration Progress

Chesapeake Bay TMDL baseline loads and required reductions for Carroll County were obtained from MDE and used in conjunction with the 2014 MDE Guidance document entitled: *Accounting for Stormwater Wasteload Allocations and Impervious Acres Treated* to evaluate Bay restoration progress. Loading rates of TN, TP, and TSS for urban land were obtained from MDE (MDE, 2014) and used to calculate load reductions from BMPs. These loading rates from MDE were used instead of developing watershed-specific loading rates using MapShed because they correspond to the broader accounting procedure used by the Chesapeake Bay Watershed Model.

Delivered load ratios were applied to BMP load reductions (Appendix E) calculated using the 2014 MDE Guidance document so that they correspond to the Bay TMDL delivered load allocations and reductions shown in Table 15. A delivered load is the amount of pollutant delivered to the tidal waters of the Chesapeake Bay or its tidal tributaries from an upstream point (chesapeakebay.net). Delivery factors differ by land-river segment and are based upon the estimated amount of attenuation that occurs in the tributaries before it reaches the mainstem of the Chesapeake Bay due to natural in-stream processes. The delivered load ratios for the Potomac River segment within the Double Pipe Creek Watershed are 0.47 for phosphorus and 0.65 for suspended sediment (MAST, 2016). There are three delivery ratios for nitrogen, depending on the river segment: PM1_3120_3400, PM1_3450_3400, and PM3_3040_3340, which are 0.30, 0.25, and 0.23, respectively. Essentially, if one pound of nitrogen is discharged into a tributary within the Double Pipe portion of the Potomac River segment, only 25% of that pound is reaching the Bay.

Table 20 shows the Chesapeake Bay TMDL for the Potomac land river segment portion of Carroll County, as well as the progress toward meeting the TMDL from BMPs that are both implemented and planned within the Double Pipe Creek Watershed.

The baseline and reductions represent a combination of the County Phase I and Municipal Phase II based on the MOA between the County and each of the Municipalities that combined the jurisdictions into one permit. The aggregated load allocations for

municipalities within the Potomac land river segment were added to the County load allocations obtained from the TMDL Data Center to determine the combined baseline loads and reductions.

The load reductions from BMPs implemented in the Double Pipe Creek Watershed show the restoration progress towards meeting the County's Bay TMDL reductions for the Potomac segment shed. The Double Pipe Creek Watershed covers 76.5% of the Potomac land-river segment within Carroll County.

Table 20: Carroll County¹ Bay TMDL Restoration Progress, including planned practices for the Double Pipe Creek Watershed based on Delivered Loads²

	Total Phosphorus (TP) ³						
2009 Delivered Baseline (lbs.)	% Reduction	Reduction (lbs.)	Reduction from BMPs implemented 2009-2019 (lbs.)	Reduction from BMPs implemented 2020-2025 (lbs.)	% Bay TMDL Red. by BMPs 2009-2025		
10,100.99	22.07%	2,228.95	94.12	404.38	22.36%		
		Total	Nitrogen (TN)				
2009 Delivered Baseline (lbs.)	% Reduction	Reduction (lbs.)	Reduction from BMPs implemented 2009-2019 (lbs.)	Reduction from BMPs implemented 2020-2025 (lbs.)	% Bay TMDL Red. by BMPs 2009-2025		
110,661.46	9.25%	10,232.26	512.43	840.11	13.22%		

¹This table represents the combined County Phase I and Municipal Phase II loads and reductions for the Potomac land river segment of Carroll County. The BMP load reductions represent the combined reductions for County and Municipal projects in the Double Pipe Creek Watershed.

²BMP load reductions reflect delivery ratios that have been applied to the edge-of-stream load reductions calculated in Appendix E.

³There is no Chesapeake Bay TMDL allocation for TSS. Per Maryland's Phase II WIP, if TP target is met, TSS target will be met.

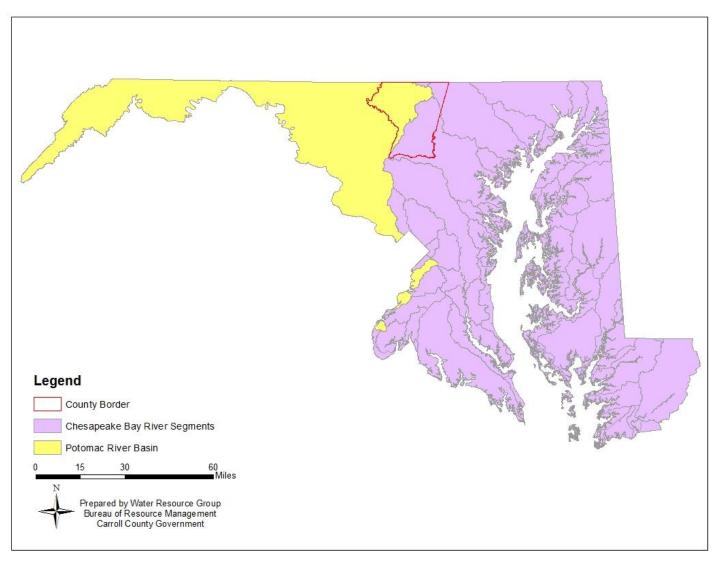


Figure 15: Chesapeake Bay River Segments

VIII. TMDL Implementation

Through the implementation of alternative BMPs, as well as the completed and planned stormwater management projects identified in the County's CIP, the phosphorus TMDL through 2019 will have achieved 7% of the required reduction since the baseline year of 2009. Based on currently identified projects, the required reduction is expected to achieve 18% by 2025. The implementation from baseline through the current CIP is achieving approximately 1.13% reduction in the TMDL/year since the baseline.

The sediment TMDL through 2019 will have achieved 16% of the required reduction since the baseline year of 2000. Based on current projects is expected to achieve 26% of the required reduction by 2025. The implementation from baseline through the current CIP is achieving approximately 1.04% reduction in the TMDL/year since the baseline.

If the County is able to achieve a 2.75% reduction rate per year for phosphorus and a 2.5% reduction rate per year for sediment, the sediment and phosphorus TMDLs in the Double Pipe Creek Watershed would be achieved by 2055. To achieve this goal, the County will continue to primarily focus on stormwater retrofits, implementing additional streamside buffer plantings, increased street sweeping and inlet cleaning, as well as potential stream restoration projects.

Table 21 lists the anticipated benchmark for each nutrient TMDL within the Double Pipe Creek Watershed, the current progress through the 2019 reporting year, the expected progress through the County's current CIP of 2025, and finally the projected end date of full implementation based on timeframe of implementation to date.

Table 21: Nutrient TMDL Benchmarks

Nutrient	2019	2025	2055
Phosphorus	7%	18%	100%
Sediment	16%	26%	100%

A. Bacteria Implementation

Through continued implementation of the County's restoration and programmatic programs to reduce pollutant loads within the watershed, the County anticipates a 2% reduction in the bacteria geometric mean per year during low flow conditions within the targeted monitoring locations associated with the County's SW WLA.

As more information regarding bacteria becomes better understood, the County will use an adaptive management process as to how to reach the pollutant target load.

IX. Caveats

While it is acknowledged lack of funding does not constitute a justification for noncompliance, this document provides potential restoration strategies that require additional assessment. Calculated nutrient reductions associated with projects that are in the preliminary planning stages may change as construction plans are finalized. It is not guaranteed that projects listed will be implemented. Implementation is contingent on approved funding and prioritization with other priorities County-wide.

In addition, Carroll County and its municipal partners still do not agree with the quantitative expectations related to Bay stormwater allocations (developed by MDE) for watersheds in Carroll County. Those objections have been forwarded to MDE by the Carroll County Water Resources Coordination Council via letters dated; November 11, 2011, June 27, 2012, and May 2, 2014. Therefore, the County and its municipal partners reserve the right to make future refinements to this plan based upon new or additional information, or should any previously designated allocation be found to be invalid by technical or legal processes.

X. Public Participation

Initial public outreach of this restoration plan will focus on landowners who will potentially be affected by the watershed plan. Upon draft completion of the Double Pipe Creek Watershed restoration plan, the Bureau of Resource Management will post the plan for a period of thirty (30) days on the Bureau's website. During the thirty day public comment period inputs from any stakeholder or the public will be gathered and, as appropriate, may be incorporated into the plan before the final plan is released.



XI. References

Betz, D-E, B. Evans. 2015. Using MapShed Model for the Christina Basin TMDL Implementation and Water Quality Restoration. Villanova Urban Stormwater Partnership Symposium. Retrieved from

https://www1.villanova.edu/content/dam/villanova/engineering/vcase/sym-presentations/2015/Presentationpdfs/3C4-Betz%20VILLANOVA10%2014%2015.pdf

CADMUS. 2009. Total Maximum Daily Load (TMDL) for Phosphorus in Summit Lake. The CADMUS Group, Inc., Waltham, MA. Retrieved from http://www.dec.ny.gov/docs/water_pdf/tmdlsummitlk09.pdf

Booth, D. and P. Henshaw. 2001. Rates of channel erosion in small urban streams. Water Science and Application. 2:17-38.

Clary, J., Jones, J. E., Urbonas, B. R., Quigley, M. M., stecker, E., & Wagner, T. (2008, May). Can Stormwater BMPs Remove Bacteria? New findings from the International Stormwater BMP Database. *Stormwater Magazine*. Retrieved from http://www.stormh2o.com/SW/Articles/Can_Stormwater_BMPs_Remove_Bacteria_203.aspx

CEC (Chesapeake Executive Council). 1987. *Chesapeake Bay Agreement*. Chesapeake Bay Program, Annapolis, MD.

Coyle, K. (2005). Environmental Literacy in America. Retrieved from http://www.neefusa.org/pdf/ELR2005.pdf

Dollar, E.S.J. 2000. Fluvial geomorphology. Progress in Physical Geography 24(3): 385-406.

Environmental Protection Agency. (2012, March 6). Water: Monitoring & Assessment; 5.11 Fecal Bacteria.

Evans, B. M., K. J. Corradini. 2015. MapShed Version 1.3 Users Guide. Penn State Institutes of Energy and the Environment. Retrieved from http://www.mapshed.psu.edu/Downloads/MapShedManual.pdf

Klein, R. 1979. Urbanization and stream quality impairment. Water Resources Bulletin 15:948–963.

Langland, M. and S. Cronin, 2003. A summary report of sediment processes in Chesapeake Bay and watershed. U.S. Geological Survey Water Resources Investigation Report 03-4123 Maryland Department of the Environment (MDE). (2000). Maryland Stormwater Design Manual , Volumes I and II.

MapShed [Computer Software]. 2015. Retrieved from http://www.mapshed.psu.edu/download.htm.

Maryland Assessment and Scenario Tool (MAST). 2016. MAST Source Data. Retrieved from http://www.mastonline.org/Documentation.aspx.

Maryland Department of the Environment (MDE). (2000). Maryland Stormwater Design Manual, Volumes I and II.

Maryland Department of the Environment (MDE). (2012). Total Maximum Daily Loads of Phosphorus in the Double Pipe Creek Watershed, Frederick and Carroll Counties, Maryland.

Maryland Department of the Environment (MDE). (2009). Total Maximum Daily Loads of Fecal Bacteria for the Double Pipe Creek Basin in Carroll and Frederick Counties, Maryland.

Maryland Department of the Environment (MDE). (2008). Total Maximum Daily Loads of Sediment in the Double Pipe Creek Watershed, Frederick and Carroll Counties, Maryland.

Maryland Department of the Environment (MDE). (2011). Accounting for Stormwater Wasteload Allocations and Impervious Acres Treated, Guidance for National Pollution Discharge Elimination System Stormwater Permits. Retrieved from: http://www.mde.state.md.us/programs/Water/StormwaterManagementProgram/Documents/NPDES%20Draft%20Guidance%206_14.pdf.

Maryland Department of the Environment (MDE). (2014). Accounting for Stormwater Wasteload Allocations and Impervious Acres Treated. Retrieved from: http://www.mde.state.md.us/programs/Water/StormwaterManagementProgram/Documents/NPDES%20MS4%20Guidance%20August%2018%202014.pdf.

Paul, M. J., and J. L. Meyer. 2001. Streams in the urban landscape. Annual Review of Ecology and Systematics 32:333-65.

Penn State. 2016. Mapshed Overview. Retrieved from http://www.mapshed.psu.edu/overview.htm

Southerland, M., L. Erb, G. Rogers, R. Morgan, K. Eshleman, M. Kline, K. Kline, S. Stranko, P. Kazyak, J. Kilian, J. Ladell, and J. Thompson. 2005. Maryland Biological Stream Survey 2000-2004, Volume 14: Stressors Affecting Maryland Streams (CBWP-MANTA-EA-05-11). Report prepared for Maryland Department of Natural Resources, Monitoring and Non-Tidal Assessment Division, Annapolis, MD.

Scott Stranko, Dan Boward, Jay Kilian, Andy Becker, Matthew Ashton, Mark Southerland, Beth Franks, William Harbold, and Jason Cessna. 2014. Maryland Biological Stream Survey: Round Four Field Sampling Manual

Soar, P.J., and C.R. Thorne. September 2001. Channel restoration design for meandering rivers. U.S. Army Corp of Engineers. Report ERDC/CHL.

Tetra Tech Inc. 2014. Land Use Loading Literature Review Task Summary and Results. Retrieved from http://www.chesapeakebay.net/channel_files/21151/attachment_f-tetra_tech_urban_loads_literature_review_memo_20140331.pdf.

USEPA (U.S. Environmental Protection Agency). 2005. Fact Sheet for public education and outreach minimum control measure revised. EPA 833-F00-005.

Walker, S., Mostaghimi, S., Dillaha, T. A., & Woeste, R. E. (1990). MODELING ANIMAL WASTE MANAGEMENT PRACTICES: IMPACTS ON BACTERIA LEVELS IN RUNOFF FROM AGRICULTURAL LANDS. *American Society of Agricultural Engineers VOL.* 33(3): MAY-JUNE 1990

Yetman, K.T. 2001. Stream Corridor Assessment Survey, SCA Survey Protocols. Watershed Restoration Division, Annapolis, MD.



XII. Appendix A: Watershed Restoration Projects

Project Name	Town/County	Watershed	Project Status	Project Cost	Anticipated Completion
SWM Facilities	County	2130907	Completed	\$4,318,182	Completed
Buffer Plantings	County	2130907	Completed	\$455,344	Completed
Catch Basin/Inlet Cleaning	New Windsor	2130907	Completed	**	Annual
Catch Basin/Inlet Cleaning	Manchester	2130907	Completed	**	Annual
Catch Basin/Inlet Cleaning	Westminster	2130907	Completed	**	Annual
Catch Basin/Inlet Cleaning	Union Bridge	2130907	Completed	**	Annual
Street Sweeping	Westminster	2130907	Completed	**	Annual
Water/floodplain Easement	Watershed	2130907	Completed	N/A	Completed
SWM (Planned)*	County	2130907	Planning/Design	\$5,109,885	FY19-25
TBD*	Watershed	2130907	Planning/Design	\$28,000,000	TBD
			<u> </u>	•	

^{*}Costs for proposed Stormwater facilities are based on current FY19-FY25 project costs, which may be subject to change.

^{**}Project Costs not reported.

XIII. Appendix B: Water Resource and Floodplain Protection Easements

Water Resource Protection Easements

Subwatershed	Recorded Date	Subdivision	Acres	Type*
Sam's Creek	8/1/2000	Sun Valley, Section 2	0.01	FWRPE
Silver Run	8/25/2000	Ellen's Dilemma	0.70	FWRP
Meadow Branch	1/25/2001	Catoctin Summit 2	0.02	FWRPE
Meadow Branch	11/30/2001	Coventry at Westminster	0.34	NFWRPE
Meadow Branch	11/30/2001	Coventry at Westminster	3.08	FWRPE
Big Pipe Creek	5/16/2002	New Beginnings	4.30	NFWRPE
Little Pipe Creek	4/22/2003	Doves Crest	0.48	FWRPE
Sam's Creek	1/25/2005	Greenwood Overlook	2.23	FWRPE
Turkeyfoot Run	4/11/2005	Snavely Forest	3.59	FWRPE
Turkeyfoot Run	4/12/2005	Snaveley Forest	5.94	FWRPE
Meadow Branch	5/4/2005	Naomi's Delight, Section 4	5.00	NFWRPE
Little Pipe Creek	6/17/2005	Camelot Plaza, Section One	0.44	FWRPE
Meadow Branch	7/8/2005	Brilhart Property	0.44	FWRPE
Meadow Branch	7/14/2005	Stone's Throw	0.49	FWRPE
Silver Run	11/3/2005	Heather's Land	1.15	FWRPE
Big Pipe Creek	12/15/2005	Schatzies Choice	0.71	FWRPE
Meadow Branch	12/22/2005	Walgarmyr	3.34	NFWRPE
Meadow Branch	12/22/2005	Walgarmyr	0.65	FWRPE
Big Pipe Creek	5/22/2006	Hoke Property, 2nd Off Conveyance	10.64	NFWRP
Little Pipe Creek	9/12/2006	Burleson Property	0.29	FWRPE
Big Pipe Creek	10/2/2006	Bowling Brook	20.34	FWRPE
Bear Branch	11/21/2006	Westvale	0.42	NFWRP
Big Pipe Creek	1/23/2007	Spring Meadow, Amended Plat Tract 1	0.59	FWRP
Silver Run	11/15/2007	Sterling Ridge Estates	1.45	FWRP
Big Pipe Creek	2/28/2008	Dutchmans' Bluff	3.14	FWRPE
Big Pipe Creek	2/28/2008	Dutchmans' Bluff	1.32	NFWRP
Cherry Branch/Little Pipe Creek	6/5/2008	Key Estates	0.37	FWRP

Dickenson Run	6/5/2008	Johnson Property	0.41	NFWRP
Sam's Creek	9/17/2008	Lehigh Cement Company	10.58	NFWRP
Sam's Creek	9/17/2008	Lehigh Cement Company	46.28	FWRPE
Priestland Branch/Wolf Pit Creek	11/4/2008	Bark Hill Park	0.01	FWRPE
Priestland Branch/Wolf Pit Creek	11/4/2008	Bark Hill Park	0.10	NFWRP
Big Pipe Creek	9/16/2009	Bixler Property Hangover Parcel	3.27	NFWRPE
Little Pipe Creek	3/5/2010	Greenvale Mews	2.41	NFWRPE
Little Pipe Creek	3/5/2010	Greenvale Mews	0.06	FWRPE
Big Pipe Creek	3/9/2010	Krom's Keep	0.01	FWRPE
Meadow Branch	4/12/2010	Watts Property	1.06	NFWRPE
Big Pipe Creek	4/16/2010	Big Pipe Overlook	0.32	FWRPE
Deep Run	4/22/2010	Cox Hillside	0.12	FWRPE
Big Pipe Creek	6/2/2010	Drifting Snow	0.81	NFWRPE
Bear Branch	6/25/2010	Dachille Property	2.52	NFWRPE
Bear Branch	12/10/2010	Carroll County Public Transportation Building	8.80	FWRPE
Little Pipe Creek	6/3/2011	Nadine's Overlook	2.03	FWRPE
Little Pipe Creek	6/3/2011	Nadine's Overlook	3.26	NFWRPE
Little Pipe Creek	6/9/2011	Father's Care, LLC Property	1.91	FWRPE
Big Pipe Creek	8/1/2011	Bedford Falls Farm	3.72	NFWRPE
Big Pipe Creek	1/5/2012	Jordans Crossing	1.36	FWRPE
Meadow Branch	7/26/2012	Jacobs Ridge 2	0.01	FWRPE
Meadow Branch	11/9/2012	Jacob's Ridge 3	0.09	FWRPE
Meadow Branch	11/9/2012	Jacob's Ridge 3	0.31	NFWRPE
Sam's Creek	9/16/2014	Vista Green	0.30	FWRPE
Sam's Creek	9/16/2014	Vista Green	0.14	NFWRPE
Big Pipe Creek	1/5/2015	Was-Mere Acres	6.43	FWRPE
Dickenson Run	2/25/2015	Lehigh New Windsor Quarry	13.21	NFWRPE
Bear Branch		Richardson Property	1.13	FWRPE
	Water I	Resource Easement Totals:	182.14	

^{*}FWRPE = Forested Water Resource Protection Easement

^{*}NFWRPE = Non-Forested Water Resource Protection Easement

^{*}FEMA = Federal Emergency Management Agency

Floodplain Protection Easements

Subwatershed	Recorded Date	Subdivision	Acres	FEMA*
Little Pipe Creek	4/9/2003	Doves Crest	0.64	Υ
Sams Creek	12/20/2004	Greenwood Overlook	0.02	N
Bear Branch	1/14/2005	Sunny View Acres	0.06	N
Turkeyfoot Run	4/11/2005	Snavely Forest	0.01	N
Meadow Branch	4/28/2005	Naomi's Delight	0.24	N
Meadow Branch	6/16/2005	Brilhart Property	0.23	N
Little Pipe Creek	6/17/2005	Camelot Plaza	0.01	Υ
Little Pipe Creek	6/17/2005	Camelot Plaza	6.46	Υ
Meadow Branch	6/23/2005	Stone's Throw, Section 2	2.14	Υ
Silver Run	11/3/2005	Heather's Land	0.00	N
Meadow Branch	12/22/2005	Walgarmyr, Section 2	0.16	N
Meadow Branch	12/22/2005	Walgarmyr, Section 2	0.00	N
Big Pipe Creek	5/31/2006	Hoke Property, OC #2	3.25	Υ
Big Pipe Creek	10/2/2006	Bowling Brook	0.17	N
Big Pipe Creek	10/2/2006	Bowling Brook	0.01	N
Big Pipe Creek	10/2/2006	Bowling Brook	0.00	N
Big Pipe Creek	10/2/2006	Bowling Brook	0.46	N
Silver Run	11/30/2006	Arters Mill Estates	1.12	N
Silver Run	11/15/2007	Sterling Ridge Estates	0.00	N
Big Pipe Creek	2/28/2008	Dutchmans' Bluff	4.65	Υ
Sams Creek	9/17/2008	Lehigh Cement	0.67	Υ
Sams Creek	9/17/2008	Lehigh Cement	23.48	Υ
Priestland Branch/Wolf	10/14/2008	Uniontown Bible Church	1.10	Υ
Priestland Branch/Wolf	10/14/2008	Uniontown Bible Church	0.55	Υ
Priestland Branch/Wolf	10/14/2008	Uniontown Bible Church	4.56	Υ
Priestland Branch/Wolf	10/14/2008	Uniontown Bible Church	3.56	Υ
Big Pipe Creek	8/18/2009	Schatzie's Choice,	0.05	Υ
Big Pipe Creek	8/21/2009	Silver Run Estates - Lot	0.80	Υ
Little Pipe Creek	3/2/2010	Greenvale Mews	0.57	Υ
Little Pipe Creek	3/2/2010	Greenvale Mews	0.06	N
Big Pipe Creek	4/4/2010	Bixler Hangover Parcel	0.04	N
Deep Run	4/22/2010	Cox Hillside	0.04	N
Big Pipe Creek	5/25/2010	Drifting Snow	0.07	N
Little Pipe Creek	6/3/2011	Nadine's Overlook	0.66	Υ
Little Pipe Creek	6/3/2011	Nadine's Overlook	0.08	N
Little Pipe Creek	6/3/2011	Nadine's Overlook	0.00	Υ

Double Pipe Creek Watershed Restoration Plan

	oodplain Easement Total:	62.83		
Big Pipe Creek	3/24/2015	Was-Mere Acres	0.25	N
Big Pipe Creek	3/24/2015	Was-Mere Acres	4.47	N
Big Pipe Creek	3/24/2015	Was-Mere Acres	1.53	Υ
Meadow Branch	11/9/2012	Jacob's Ridge 3	0.01	Υ
Meadow Branch	7/26/2012	Jacob's Ridge 2	0.00	Υ
Big Pipe Creek	1/5/2012	Jordans Crossing	0.01	N
Big Pipe Creek	1/5/2012	Jordans Crossing	0.01	N
Big Pipe Creek	8/1/2011	Bedford Falls Farm	0.21	N
Little Pipe Creek	6/9/2011	Father's Care, LLC	0.41	Υ



XIV. Appendix C: Double Pipe Creek BAT Septic Systems

DNR 12- digit scale	SubWatershed	Project Type	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	Total 2008- 2019
0281	Bear Branch	Septic Repair	0	0	0	0	0	0	0	2	2	0	1	1	0
0201	Dear Branen	New Construction	0	0	0	0	0	1	1	1	1	0	0	0	4
0282	Bear Branch	Septic Repair	0	0	0	0	0	0	0	0	0	0	0	0	0
0282	Bear Branch	New Construction	0	0	0	0	0	0	0	0	1	0	0	0	1
0278	Dia Dia a Casala	Septic Repair	1	1	0	0	1	0	0	2	2	0	0	0	7
0278	Big Pipe Creek	New Construction	0	0	0	0	0	0	0	0	2	0	0	0	2
0279	Dia Dina Cuals	Septic Repair	0	0	0	0	0	0	0	1	2	0	0	0	3
0279	Big Pipe Creek	New Construction	0	0	0	0	0	0	0	0	0	0	0	0	0
0280	Dia Dina Cuals	Septic Repair	0	0	0	0	0	0	0	0	0	1	0	1	2
0280	Big Pipe Creek	New Construction	0	0	0	0	0	0	0	1	0	0	0	0	1
0283	Dia Dina Cuals	Septic Repair	0	0	0	0	0	0	0	1	1	3	0	0	5
0283	Big Pipe Creek	New Construction	0	0	0	0	0	0	0	1	1	0	0	0	2
0284	Dia Dina Cuals	Septic Repair	0	0	0	0	0	0	0	0	0	0	0	0	0
0284	Big Pipe Creek	New Construction	0	0	0	0	0	0	0	0	0	0	0	0	0
0286	Dia Dina Cuals	Septic Repair	0	1	0	0	0	0	0	1	0	1	0	0	3
0280	Big Pipe Creek	New Construction	0	0	0	0	0	0	0	0	2	0	0	0	2
0287	Dia Dina Craals	Septic Repair	0	1	0	0	0	0	1	0	0	0	0	0	2
0287	Big Pipe Creek	New Construction	0	0	0	0	0	0	0	0	0	0	0	0	0
0274	Cherry Branch / Little	Septic Repair	0	0	0	0	0	0	0	1	1	0	0	0	2
0274	Pipe Creek	New Construction	0	0	0	0	0	0	0	0	0	0	0	0	0

0288	Door Burn	Septic Repair	0	0	0	1	0	0	0	0	0	0	0	0	1
0288	Deep Run	New Construction	0	0	0	0	0	0	0	0	1	0	0	0	1
0271	Dickenson Run	Septic Repair	0	0	0	0	0	0	0,	1	0	0	0	0	1
02/1	Dickenson Run	New Construction	0	0	0	0	0	0	0	0	0	0	0	0	0
0248	Davida Bina Cuada	Septic Repair	0	0	0	1	0	0	0	0	0	0	0	0	1
0248	Double Pipe Creek	New Construction	0	0	0	0	0	0	0	0	0	0	0	0	0
0272	Little Dine Creek	Septic Repair	0	0	0	0	0	1	0	0	0	0	0	0	1
0272	Little Pipe Creek	New Construction	0	0	0	0	0	0	0	0	0	0	0	0	0
0276	Little Dine Creek	Septic Repair	0	0	0	0	0	0	0	0	0	0	0	0	0
0276	Little Pipe Creek	New Construction	0	0	0	0	2	1	0	0	4	0	0	0	7
0277	Meadow Branch	Septic Repair	0	0	0	0	0	0	0	0	2	0	1	0	3
0277	Meadow Branch	New Construction	0	0	0	0	0	0	2	2	1	0	0	1	6
0273	Priestland / Wolf Pit	Septic Repair	0	0	0	0	0	0	0	0	0	0	0	0	0
0273	Branch	New Construction	0	0	0	0	0	0	0	2	0	0	0	0	2
0268	Sams Creek	Septic Repair	0	0	0	0	0	0	0	1	0	0	1	0	2
0208	Sams Cleek	New Construction	0	0	0	0	0	0	0	1	2	0	2	0	5
0269	Sams Creek	Septic Repair	0	0	0	0	0	0	0	0	0	0	0	0	0
0209	Sams Cleek	New Construction	0	0	0	0	0	0	0	0	0	0	0	0	0
0285	Silver Run	Septic Repair	0	0	0	0	0	0	0	0	0	1	0	0	1
0263	Silvel Kull	New Construction	0	0	0	0	0	1	0	0	0	0	0	0	1
0275	Turkeyfoot Run	Septic Repair	0	0	0	0	0	0	0	1	1	0	1	0	3
0273	Turkeyroot Kull	New Construction	0	0	0	0	0	0	0	1	0	0	0	0	1

XV. Appendix D: Local TMDL Load Reduction Calculations with GWLF-E Land Cover Loading Rates and MDE (2014)

SWM Facilities

Project	Project Type	Drainage Area (Ac)	Impervious Area (Acres)	Practice Type	Runoff depth treated (In.)	% Urban TN Load Reduction	TN BMP Efficiency (%)	TN Pollutant Loads Reduced (lbs)	% Urban TP Load Reduction	TP BMP Efficiency	TP Pollutant Loads Reduced (lbs)	% Urban TSS Load Reduction	TSS BMP Efficiency	TSS Pollutant Loads Reduced (Tons)
Sunnyside	Facility	30.2	2.69	ST	1.91	0.09449%	39	5.0928	0.15831%	61	1.4849	0.2173%	78	3.07
Friendship Overlook	Retrofit	82.01	15.88	ST	1.68	0.2539%	39	13.68	0.4251%	61	3.99	0.5836%	77	8.24
CC Farm Museum	Facility	6.44	0.45	RR	1.40	0.0333%	64	1.79	0.0414%	75	0.39	0.0478%	80	0.68
Farm Museum 1	Facility	11.61	2.3	RR	1.44	0.0602%	65	3.25	0.0750%	76	0.70	0.0866%	81	1.22
Farm Museum 2	Facility	0.09	0.05	RR	1.00	0.0015%	60	0.08	0.0013%	70	0.01	0.0007%	75	0.01
Farm Museum 3	Facility	0.79	0.06	RR	1.00	0.0038%	60	0.20	0.0047%	70	0.04	0.0055%	75	0.08
Farm Museum 4	Facility	0.03	0.03	RR	1.00	0.0005%	60	0.03	0.0004%	70	0.00	0.0002%	75	0.00
Farm Museum 5	Facility	0.01	0.01	RR	1.00	0.0002%	60	0.01	0.0001%	70	0.00	0.0001%	75	0.00
CC Maintenance	Retrofit	45.49	25.05	ST	2.50	0.4879%	39	26.29	0.5670%	62	5.32	0.3746%	79	5.29
Blue Ridge Manor	Retrofit	36.28	9.26	RR	1.86	0.1940%	67	10.45	0.2416%	78	2.27	0.2790%	83	3.94
Exceptional Center	Retrofit	46.5	14.7	ST	1.51	0.4826%	38	26.01	0.5590%	60	5.24	0.3697%	76	5.22
Langdon	Facility	194	92.1	ST	1.00	1.8495%	35	99.69	2.1422%	55	20.09	1.4169%	70	20.00
Elmer Wolfe	Facility	9.78	4.26	ST	1.50	0.1014%	38	5.47	0.1175%	60	1.10	0.0777%	76	1.10
Locust Wetland	Facility	35.9	11	ST	1.00	0.34%	35%	18.45	0.40%	55%	3.72	0.2622%	70%	3.70

CC Health Dept	Facility	14.77	6.72	RR	2.50	0.27%	68%	14.70	0.23%	79%	2.20	0.1306%	85%	1.84
Long Valley Rd	Facility	98.32	16.64	RR	2.50	0.53%	68%	28.80	0.66%	79%	6.22	0.7679%	85%	10.84
Greens of Westminster Sec6 #2	Retrofit	41	15.6	ST	2.50	0.44%	39%	23.70	0.51%	62%	4.79	0.3376%	79%	4.77
New Windsor Railroad Track	Facility	34.5	15.34	ST	1.00	0.33%	35%	17.73	0.38%	55%	3.57	0.2520%	70%	3.56
Avondale Run Phase 2	Retrofit	7.86	1.84	RR	2.50	0.04%	68%	2.30	0.05%	79%	0.50	0.0614%	85%	0.87
Carroll County Airport	Retrofit	38.4	7.4	RR	2.50	0.21%	68%	11.25	0.26%	79%	2.43	0.2999%	85%	4.23
Meadow Ridge 171	Retrofit	22.1	5.73	ST	1.00	0.06%	35%	3.34	0.10%	55%	0.97	0.1425%	70%	2.01
Meadow Ridge 172	Retrofit	18.2	5.35	ST	1.00	0.05%	35%	2.75	0.09%	55%	0.80	0.1174%	70%	1.66
	Total:	774.28	252.46											

Streambank Regeneration¹

						TSS Pollutant				
		% Urban TN Load	TN Pollutant Loads	% Urban TP Load	TP Pollutant Loads	% Urban TSS Load	Loads Reduced	TSS Pollutant Loads		
Location	Linear Feet	Reduction	Reduced (lbs)	Reduction	Reduced (lbs)	Reduction	(lbs)	Reduced (tons)		
Blue Ridge Manor	220	0.03%	1.47	0.14%	1.28	0.016%	441.06	0.22		
Total:		0.03%	1.47	0.14%	1.28	0.016%	441.06	0.22		

¹A study is currently underway by the County to evaluate streambank regeneration as an innovative practice following the guideline in MDE (2014). In the interim, the default stream restoration credit is combined with equivalent impervious area, as suggested in the 2014 MDE guidance, is used here to estimate nutrient and sediment reductions from this practice. Also see BMP Assumptions in Appendix D.

Stream Restoration

						TSS Pollutant				
		% Urban TN Load	TN Pollutant Loads	% Urban TP Load	TP Pollutant Loads	% Urban TSS Load	Loads Reduced	TSS Pollutant Loads		
Location	Linear Feet	Reduction	Reduced (lbs)	Reduction	Reduced (lbs)	Reduction	(lbs)	Reduced (tons)		
Dickenson	2580	0.32%	17.22	1.60%	15.05	0.183%	5172.42	2.59		
Run										
Total:		0.32%	17.22	1.60%	15.05	0.183%	5172.42	2.59		

Floodplain Reconnect

						TSS Pollutant				
		% Urban TN Load	TN Pollutant Loads	% Urban TP Load	TP Pollutant Loads	% Urban TSS Load	Loads Reduced	TSS Pollutant Loads		
Location	Linear Feet	Reduction	Reduced (lbs)	Reduction	Reduced (lbs)	Reduction	(lbs)	Reduced (tons)		
Mayberry	6255	0.770/	44.75	2.000/	26.40	0.4440/	12540.12	C 27		
Gun Club	6255	0.77%	41.75	3.89%	36.48	0.444%	12540.12	6.27		
Total:		0.77%	41.75	3.89%	36.48	0.444%	12540.12	6.27		

Catch Basin/inlet Cleaning

		TN lbs reduced/ton	TN Pollutant Loads Reduced [delivered] (lbs)	TP lbs reduced/ton	TP Pollutant Loads Reduced [delivered] (lbs)	TSS lbs reduced/ton	TSS Pollutant Loads Reduced [delivered] (lbs)	TSS Pollutant Loads Reduced [delivered] (Tons)	
Manchester	0.42	3.5	1.47 [0.06]	1.4	0.588 [0.02]	420	176.4 [18.63]	0.088 [0.01]	
New Windsor	0.08	3.5	0.28 [0.01]	1.4	0.112 [0.00]	420	33.6 [3.55]	0.017 [0.00]	
Union Bridge	0.72	3.5	2.52 [0.10]	1.4	1.008 [0.04]	420	302.4 [31.94]	0.151 [0.02]	
Westminster	0.44	3.5	1.54 [0.06]	1.4	0.616 [0.02]	420	184.8 [19.52]	0.092 [0.01]	
		Total:	5.81 [0.23]		2.324 [0.08]		697.2 [73.64]	0.348 [0.04]	

Street Sweeping

Location	Acres	TN Pollutant Load	Total Loads (lbs)	TN BMP Efficiency (%)	TN Pollutant Loads Reduced [delivered] (lbs)	TP Pollutant Load	Total Loads (lbs)	TP BMP Efficiency	TP Pollutant Loads Reduced [delivered] (lbs)	TSS Pollutant Load (tons/ac)	Total Loads (tons)	TSS BMP Efficiency	TSS Pollutant Loads Reduced [delivered] (Tons)
Westminster	7.62	11.7	89.154	4	3.56616 [0.14]	0.68	5.1816	4	0.207264 [0.01]	0.18	1.3716	10	0.13716 [0.01]
		Total:	89.1540		3.5662 [0.14]		5.1816		0.2073 [0.01]		1.3716		0.1372 [0.01]

Stream Buffer Plantings

Project	Acres	% Urban TN Load Reduction	TN BMP Efficiency (%)	TN Pollutant Loads Reduced (lbs)	% Urban TP Load Reduction	TP BMP Efficiency	TP Pollutant Loads Reduced (lbs)	% Urban TSS Load Reduction	TSS BMP Efficiency	TSS Pollutant Loads Reduced (Tons)
Planting 1	4.13	0.0219%	66	1.179	0.0272%	77	0.255	0.0233%	57	0.298
Planting 2	10.85	0.0575%	66	3.099	0.0715%	77	0.670	0.0611%	57	0.783
Planting 3	0.2	0.0011%	66	0.06	0.0013%	77	0.01	0.0011%	57	0.01
Planting 4	1.4	0.0074%	66	0.40	0.0092%	77	0.09	0.0079%	57	0.10
Planting 5	0.5	0.0026%	66	0.14	0.0033%	77	0.03	0.0028%	57	0.04
Planting 6	0.3	0.0016%	66	0.09	0.0020%	77	0.02	0.0017%	57	0.02
Planting 7	0.65	0.0034%	66	0.19	0.0043%	77	0.04	0.0037%	57	0.05
Planting 8	2.3	0.0122%	66	0.66	0.0151%	77	0.14	0.0130%	57	0.17
Planting 9	0.4	0.0021%	66	0.11	0.0026%	77	0.02	0.0023%	57	0.03
Planting 10	2.25	0.0119%	66	0.64	0.0148%	77	0.14	0.0127%	57	0.16
Planting 11	0.2	0.0011%	66	0.06	0.0013%	77	0.01	0.0011%	57	0.01

Planting 12	0.62	0.0033%	66	0.18	0.0041%	77	0.04	0.0035%	57	0.04
Planting 13	1.8	0.0095%	66	0.51	0.0119%	77	0.11	0.0101%	57	0.13
Planting 14	0.9	0.0048%	66	0.26	0.0059%	77	0.06	0.0051%	57	0.06
Planting 15	0.26	0.0014%	66	0.07	0.0017%	77	0.02	0.0015%	57	0.02
Planting 16	3	0.0159%	66	0.86	0.0198%	77	0.19	0.0169%	57	0.22
Planting 17	9	0.0477%	66	2.57	0.0593%	77	0.56	0.0507%	57	0.65
Planting 18	0.13	0.0007%	66	0.04	0.0009%	77	0.01	0.0007%	57	0.01
Planting 19	0.6	0.0032%	66	0.17	0.0040%	77	0.04	0.0034%	57	0.04
Planting 20	0.2	0.0011%	66	0.06	0.0013%	77	0.01	0.0011%	57	0.01
Planting 21	1.25	0.0066%	66	0.36	0.0082%	77	0.08	0.0070%	57	0.09
Planting 22	0.45	0.0024%	66	0.13	0.0030%	77	0.03	0.0025%	57	0.03
Planting 23	2.2	0.0117%	66	0.63	0.0145%	77	0.14	0.0124%	57	0.16
Planting 24	1.62	0.0086%	66	0.46	0.0107%	77	0.10	0.0091%	57	0.12
Planting 25	4.26	0.0226%	66	1.22	0.0281%	77	0.26	0.0240%	57	0.31
Planting 26	1.8	0.0095%	66	0.51	0.0119%	77	0.11	0.0101%	57	0.13
Planting 27	2.05	0.0109%	66	0.59	0.0135%	77	0.13	0.0108%	57	0.15
Planting 28	0.59	0.0031%	66	0.17	0.0039%	77	0.04	0.0031%	57	0.04
Planting 29	0.44	0.0023%	66	0.13	0.0029%	77	0.03	0.0023%	57	0.03
Planting 30	0.17	0.0009%	66	0.05	0.0011%	77	0.01	0.0009%	57	0.01
Planting 31	0.22	0.0012%	66	0.06	0.0014%	77	0.01	0.0012%	57	0.02
Total:	54.74									

Water Resource Easements--Efficiency factors from 2011 Guidance

Subdivision	Acres	Recorded Date	% Urban TN Load Reduction	TN BMP Efficiency (%)	TN Pollutant Loads Reduced (lbs)	% Urban TP Load Reduction	TP BMP Efficiency	TP Pollutant Loads Reduced (lbs) ¹	% Urban TSS Load Reduction	TSS BMP Efficiency	TSS Pollutant Loads Reduced (Tons)
Ellen's Dilemma	0.695	8/25/2000	0.0019%	30	0.09	0.0026%	40	0.02	0.0038%	55	0.05
Catoctin Summit 2	0.016	1/25/2001	0.0000%	30	0.00	0.0001%	40	0.00	0.0001%	55	0.00
Sun Valley, Section 2	0.013	6/4/2001	0.0000%	30	0.00	0.0000%	40	0.00	0.0001%	55	0.00
Coventry at Westminster	0.344	11/30/2001	0.0009%	30	0.04	0.0013%	40	0.01	0.0019%	55	0.02
New Beginnings	4.303	5/16/2002	0.0116%	30	0.55	0.0162%	40	0.14	0.0234%	55	0.30
Doves Crest	0.484	4/22/2003	0.0013%	30	0.06	0.0018%	40	0.02	0.0026%	55	0.03
Greenwood Overlook	2.233	1/25/2005	0.0060%	30	0.29	0.0084%	40	0.07	0.0121%	55	0.16
Snavely Forest	9.530	4/12/2005	0.0257%	30	1.23	0.0358%	40	0.30	0.0518%	55	0.66
Naomi's Delight, Section 4	4.998	5/4/2005	0.0135%	30	0.64	0.0188%	40	0.16	0.0272%	55	0.35
Camelot Plaza, Section One	0.445	6/17/2005	0.0012%	30	0.06	0.0017%	40	0.01	0.0024%	55	0.03
Brilhart Property	0.437	7/8/2005	0.0012%	30	0.06	0.0016%	40	0.01	0.0024%	55	0.03
Stone's Throw	0.495	7/14/2005	0.0013%	30	0.06	0.0019%	40	0.02	0.0027%	55	0.03
Heather's Land	1.150	11/3/2005	0.0031%	30	0.15	0.0043%	40	0.04	0.0062%	55	0.08
Schatzies Choice	0.707	12/15/2005	0.0019%	30	0.09	0.0027%	40	0.02	0.0038%	55	0.05
Walgarmyr	3.992	12/22/2005	0.0108%	30	0.51	0.0150%	40	0.13	0.0217%	55	0.28
Hoke Property, 2nd Off Conveyance	10.641	5/22/2006	0.0287%	30	1.37	0.0399%	40	0.34	0.0578%	55	0.74
Burleson Property	0.287	9/12/2006	0.0008%	30	0.04	0.0011%	40	0.01	0.0016%	55	0.02
Bowling Brook	20.341	10/2/2006	0.0548%	30	2.62	0.0764%	40	0.64	0.1105%	55	1.42
Westvale	0.419	11/21/2006	0.0011%	30	0.05	0.0016%	40	0.01	0.0023%	55	0.03
Spring Meadow, Amended Plat Tract 1	0.591	1/23/2007	0.0016%	30	0.08	0.0022%	40	0.02	0.0032%	55	0.04
Sterling Ridge Estates	1.454	11/15/2007	0.0039%	30	0.19	0.0055%	40	0.05	0.0079%	55	0.10
Dutchmans' Bluff	4.463	2/28/2008	0.0120%	30	0.58	0.0168%	40	0.14	0.0242%	55	0.311
Key Estates	0.368	6/5/2008	0.0010%	30	0.05	0.0014%	40	0.01	0.0020%	55	0.026

Johnson Property	0.407	6/5/2008	0.0011%	30	0.05	0.0015%	40	0.01	0.0022%	55	0.028
Lehigh Cement Company	56.861	9/17/2008	0.1532%	30	7.33	0.2135%	40	1.80	0.3090%	55	3.957
Bark Hill Park	0.111	11/4/2008	0.0003%	30	0.01	0.0004%	40	0.00	0.0006%	55	0.008
Bixler Property Hangover Parcel	3.268	9/16/2009	0.0088%	30	0.42	0.0123%	40	0.10	0.0178%	55	0.227
Greenvale Mews	2.473	3/5/2010	0.0067%	30	0.32	0.0093%	40	0.08	0.0134%	55	0.172
Krom's Keep	0.007	3/9/2010	0.0000%	30	0.00	0.0000%	40	0.00	0.0000%	55	0.000
Watts Property	1.059	4/12/2010	0.0029%	30	0.14	0.0040%	40	0.03	0.0058%	55	0.074
Big Pipe Overlook	0.318	4/16/2010	0.0009%	30	0.04	0.0012%	40	0.01	0.0017%	55	0.022
Cox Hillside	0.117	4/22/2010	0.0003%	30	0.02	0.0004%	40	0.00	0.0006%	55	0.008
Drifting Snow	0.810	6/2/2010	0.0022%	30	0.10	0.0030%	40	0.03	0.0044%	55	0.056
Dachille Property	2.518	6/25/2010	0.0068%	30	0.32	0.0095%	40	0.08	0.0137%	55	0.175
Carroll County Public Transportation Building	8.802	12/10/2010	0.0237%	30	1.13	0.0330%	40	0.28	0.0478%	55	0.613
Nadine's Overlook	2.032	6/3/2011	0.0055%	30	0.26	0.0076%	40	0.06	0.0110%	55	0.141
Father's Care, LLC Property	1.909	6/9/2011	0.0051%	30	0.25	0.0072%	40	0.06	0.0104%	55	0.133
Bedford Falls Farm	3.717	8/1/2011	0.0100%	30	0.48	0.0140%	40	0.12	0.0202%	55	0.259
Jordans Crossing	1.365	1/5/2012	0.0037%	30	0.18	0.0051%	40	0.04	0.0074%	55	0.095
Jacobs Ridge 2	0.010	7/26/2012	0.0000%	30	0.00	0.0000%	40	0.00	0.0001%	55	0.001
Jacob's Ridge 3	0.398	11/9/2012	0.0011%	30	0.05	0.0015%	40	0.01	0.0022%	55	0.028
Vista Green	0.448	9/16/2014	0.0012%	30	0.06	0.0017%	40	0.01	0.0024%	55	0.031
Was-Mere Acres	2.811	1/5/2015	0.0076%	30	0.36	0.0106%	40	0.09	0.0153%	55	0.196
Lehigh New Windsor Quarry	13.211	2/25/2015	0.0356%	30	1.70	0.0496%	40	0.42	0.0718%	55	0.919
Richardson Property	1.127	10/12/2016	0.0030%	30	0.15	0.0042%	40	0.04	0.0061%	55	0.078
Medford Quarry Amended	9.217	3/30/2017	0.0248%	30	1.19	0.0346%	40	0.29	0.0501%	55	0.642
McNemar Property OC #1	0.905	4/20/2017	0.0024%	30	0.12	0.0034%	40	0.03	0.0049%	55	0.063
Total:	182.307		0.4911%		23.50	0.6844%		5.76	0.9906%		12.69

¹TP load reductions are calculated for all easements. However, only those recorded after 2009 are counted toward the local TP TMDL required reductions.

Floodplain Easements--Efficiency factors from 2011 Guidance

Subdivision	Acres	Recorded Date	% Urban TN Load Reduction	TN BMP Efficiency (%)	TN Pollutant Loads Reduced (lbs)	% Urban TP Load Reduction	TP BMP Efficiency	TP Pollutant Loads Reduced (lbs) ¹	% Urban TSS Load Reduction	TSS BMP Efficiency	TSS Pollutant Loads Reduced (Tons)
Doves Crest	0.64	4/9/2003	0.0017%	30	0.08	0.0024%	40	0.02	0.0035%	55	0.04
Greenwood Overlook	0.02	12/20/2004	0.0001%	30	0.00	0.0001%	40	0.00	0.0001%	55	0.00
Sunny View Acres	0.06	1/14/2005	0.0002%	30	0.01	0.0002%	40	0.00	0.0003%	55	0.00
Snavely Forest	0.01	4/11/2005	0.0000%	30	0.00	0.0001%	40	0.00	0.0001%	55	0.00
Naomi's Delight	0.24	4/28/2005	0.0007%	30	0.03	0.0009%	40	0.01	0.0013%	55	0.02
Brilhart Property	0.23	6/16/2005	0.0006%	30	0.03	0.0009%	40	0.01	0.0012%	55	0.02
Camelot Plaza	6.47	6/17/2005	0.0174%	30	0.83	0.0243%	40	0.20	0.0351%	55	0.45
Stone's Throw, Section 2	2.13	6/17/2005	0.0057%	30	0.27	0.0080%	40	0.07	0.0116%	55	0.15
Heather's Land	0.00	6/23/2005	0.0000%	30	0.00	0.0000%	40	0.00	0.0000%	55	0.00
Walgarmyr, Section 2	0.16	11/3/2005	0.0004%	30	0.02	0.0006%	40	0.00	0.0009%	55	0.01
Hoke Property, OC #2	3.25	12/22/2005	0.0087%	30	0.42	0.0122%	40	0.10	0.0176%	55	0.23
Bowling Brook	0.64	12/22/2005	0.0017%	30	0.08	0.0024%	40	0.02	0.0035%	55	0.04
Arters Mill Estates	1.12	5/31/2006	0.0030%	30	0.14	0.0042%	40	0.04	0.0061%	55	0.08
Sterling Ridge Estates	0.00	10/2/2006	0.0000%	30	0.00	0.0000%	40	0.00	0.0000%	55	0.00
Dutchmans' Bluff	4.65	10/2/2006	0.0125%	30	0.60	0.0175%	40	0.15	0.0253%	55	0.3236
Lehigh Cement Company	24.40	10/2/2006	0.0657%	30	3.14	0.0916%	40	0.77	0.1326%	55	1.6981
Uniontown Bible Church	9.78	10/2/2006	0.0263%	30	1.26	0.0367%	40	0.31	0.0531%	55	0.6803
Schatzie's Choice, Section 2	0.05	11/30/2006	0.0001%	30	0.01	0.0002%	40	0.00	0.0003%	55	0.0033
Silver Run Estates - Lot 1	0.80	11/15/2007	0.0022%	30	0.10	0.0030%	40	0.03	0.0044%	55	0.0558
Greenvale Mews	0.63	2/28/2008	0.0017%	30	0.08	0.0024%	40	0.02	0.0034%	55	0.0441
Krom's Keep	0.00	9/17/2008	0.0000%	30	0.00	0.0000%	40	0.00	0.0000%	55	0.0000
Bixler Hangover Parcel	0.04	9/17/2008	0.0001%	30	0.01	0.0001%	40	0.00	0.0002%	55	0.0027
Cox Hillside	0.04	10/14/2008	0.0001%	30	0.01	0.0002%	40	0.00	0.0002%	55	0.0030

Wakefield Solar	1.59	4/22/2010	0.0043% 0.1729%	30	0.21 8.27	0.0060%	40	0.05	0.0087% 0.3488%	55	0.11
Was-Mere Acres	5.78	4/4/2010	0.0156%	30	0.75	0.0217%	40	0.18	0.0314%	55	0.40
Jacob's Ridge 3	0.01	3/2/2010	0.0000%	30	0.00	0.0000%	40	0.00	0.00003%	55	0.0004
Jacob's Ridge 2	0.00	3/2/2010	0.0000%	30	0.00	0.0000%	40	0.00	0.00001%	55	0.0001
Jordans Crossing	0.02	8/21/2009	0.0001%	30	0.00	0.0001%	40	0.00	0.00012%	55	0.0016
Bedford Falls Farm	0.21	8/18/2009	0.0006%	30	0.03	0.0008%	40	0.01	0.00114%	55	0.0145
Father's Care, LLC Property	0.41	10/14/2008	0.0011%	30	0.05	0.0015%	40	0.01	0.00223%	55	0.0286
Nadine's Overlook	0.75	10/14/2008	0.0020%	30	0.10	0.0028%	40	0.02	0.0041%	55	0.0521
Drifting Snow	0.07	10/14/2008	0.0002%	30	0.01	0.0003%	40	0.00	0.0004%	55	0.0047

¹TP load reductions are calculated for all easements. However, only those recorded after 2009 are counted toward the local TP TMDL required reductions.

XVI. Appendix E: GWLF-E Modeling Assumptions

1. Model Inputs

The GIS Data layers used for MapShed input are summarized below and include watershed boundaries (basins), Digital Elevation Model (DEM), land use, soils, streams, weather stations and directory, physiographic provinces, and counties.

- Watershed Boundaries: Maryland's 12 digit watersheds were obtained from https://data.maryland.gov/Energy-and-Environment/Maryland-s-Third-Order-12-Digit-Watersheds/wcjn-bzdz. The County also maintains a similar watershed boundary dataset, but its use for model input would require additional processing for topology correction. When 12 digit watersheds were larger than ~7000 acres or had a complex stream network, the MapShed model exhausted computer memory resources. These watersheds were broken into sub-basins to approximately split these into halves or quarters at natural stream and topographic breaks.
- <u>Digital Elevation Model</u>: The County's DEM derived from Lidar data was clipped to the Carroll County portion of the Double Pipe Creek watershed to speed processing time. This option was chosen over lowering resolution from 5 feet in order to maintain information on steep slopes for the modeling purposes.
- <u>Land Use / Land Cover:</u> Land cover data was obtained from the 2001 and 2011 National Land Cover Database (NLCD). These data were used instead of County parcel data as NLCD does not consider political boundaries. NLCD data were reclassified using ArcMap 10.2 to fit into the MapShed land use/land cover classifications (Table D-1) following guidance in Appendix G of the MapShed documentation (Evans and Corradini, 2015).

Table D-1: NLCD Reclassification into MapShed Input

NLCD (2001) Classification	Corresponding GWLF-E Classification
Open Water	Open Water
Developed, Open Space	LD Residential
Developed Low Intensity	LD Developed
Developed Medium Intensity	MD Developed
Developed, High Intensity	HD Developed
Barren Land	Disturbed
Deciduous Forest	Forest
Evergreen Forest	Forest
Mixed Forest	Forest
Shrub/Scrub	Open Land

Herbaceous	Open Land
Hay/Pasture	Hay/Pasture
Cultivated Crops	Cropland
Woody Wetlands	Wetlands
Emergent Herbaceous Wetlands	Wetlands

- Soils: Soil data was obtained from the Natural Resources Conservation Service Soil Survey (SSURGO). The data required substantial formatting and aggregating to include needed model information and was completed, in part, with the USDA Soil Data Viewer (http://www.nrcs.usda.gov/wps/portal/nrcs/detailfull/soils/home/?cid=nrcs142p2 053620) through ArcMap 10.2. Soil parameters required were area, available water-holding capacity, soil erodibility factor, and dominant hydrologic soil group.
- <u>Streams:</u> County stream data were visually evaluated to remove loops and parallel stream lines through reservoirs. These streams were generated from LIDAR data using ArcHydro. The stream locations are verified through a process that includes comparison with orthophotography and field stream walk maps.
- Weather Stations: The weather stations and the weather directory from Pennsylvania were previously developed by Penn State and are provided through the MapShed website (http://www.mapshed.psu.edu/download.htm). Hanover weather station data were used in the model and included a 22 year weather period from 1975 to 1996. The long weather period assured long-term averages were representative of wet, dry, and average years. The growing period was specified between April and September and primarily influences agricultural production and evapotranspiration.
- <u>Physiographic Province</u>: The physiographic province, another spatial MapShed input, from southcentral Pennsylvania was used to set the groundwater recession coefficient and rainfall coefficients (provided through the MapShed website). This shapefile was modified to include Carroll County. Soil loss coefficients, which are included in the physiographic province data, from southcentral Pennsylvania were also used for Carroll County.

Model default values were maintained for all parameters with the exception of the Universal Soil Loss Equation (USLE) practice factors for both Hay/Pasture and Cropland, the cover factor for Cropland, the dissolved P concentration of forest, and TSS accumulation on urban surfaces. Parameter adjustments from model defaults are shown in Table D-2 below and were based on literature and professional judgement.

Table D-2: Model parameter changes from default to better represent Carroll County.

Parameter	Default	New Value	Units	Comments
Practice Factor (pasture/hay)*	0.52	0.25	NA	Little disturbance and heavy forage assumed.
Practice Factor (cropland)**	0.52	0.25	NA	Assume contour farming and cover crops are broadly used.
Cover Factor (cropland)*	0.42	0.20	NA	Based on 2012 Agricultural Census for Corn, Beans, Canola, and Cereals acreage and state averages for no-till, conservation tillage and conventional tillage.
Dissolved P Concentration for Forest	0.01	0.1	mg/l	Assumed equal to the median open space concentration from Tetra Tech (2014). The increase accounts for potentially elevated P concentration from runoff contact with leaves.
TSS Accumulation	Imp. (Pervious) values	Imp. (Pervious) values	kg/ha/yr	EMCs from Tetra Tech (2014) used with GWLF-E runoff estimates. These adjustments
LD Mixed	2.8 (0.8)	1.21 (0.19)		were made by estimating runoff volume using GWLF-E
MD Mixed	6.2 (0.8)	2.66 (0.30)		default Curve Number (CN)
HD Mixed	2.8 (0.8)	2.66 (0.30)		values for impervious and pervious each land use and
LD Residential	2.5 (1.3)	1.21 (0.19)		applying the average event mean concentration (EMC) of 140.44 mg/l.

^{*} Cropping factors for the USLE were area weighted based on county and state averages for crop type and tillage type, respectively (see

2. BMP Assumptions

There are seven primary categories of BMPs evaluated for this plan, though not all categories have implemented or planned BMPs. The assumptions listed here are intended to align the information available for each practice (i.e. drainage area), while following

www.nass.usda.gov/Statistics by State/Maryland/Publications/News Releases/2012/mpr09-12tillage.pdf for tillage and see 2012 Carroll County Ag Census

www.agcensus.usda.gov/Publications/2012/Full_Report/Volume_1,_Chapter_2_County_Level/Marylan

d/ for crop breakdown). Base cropping factors were compiled from

www.omafra.gov.on.ca/english/engineer/facts/12-051.htm.

^{**} The default was based on dominant watershed parameters

MDE guidance by using the state of the science BMP efficiencies. The MapShed/GWLF-E process allows for the development of spatially referenced land cover loading rates for subsequent use in BMP estimates. As BMPs were decoupled from GWLF-E, post processing of these BMP data allows for BMP efficiencies consistent with MDE guidance.

Land cover loading rates from GWLF-E were developed for urban land cover and are represented in Table D-3 for the Double Pipe Creek watershed. These categories and percent imperviousness are default GWLF-E values that were verified through literature review. Drainage areas for each BMP were lumped into these categories based on the percent impervious as shown in Table D-3 based on professional judgement.

Table D-3: GWLF-E impervious assumptions, BMP drainage area grouping, and urban land cover delivered loading rates. These rates include the urban portion of stream erosion.

Land	%	BMP	TN (lbs/ac)	TP (lbs/ac)	TSS (lbs/ac)
Cover	Impervious	Drainage			
		Area %			
		Impervious			
		Range			
			2011	2011	2001
LD Mixed	15	>5 to <30	0.43	0.08	253.09
MD Mixed	52	>=30 to <70	1.47	0.19	287.00
HD Mixed	87	>=70	1.53	0.20	288.84
LD	15	>5 to <30	0.43	0.08	253.03
Residential					

The local TP TMDL baseline year is 2009 and the local TSS TMDL baseline year is 2000, which means any retrofitted water quality BMPs installed since these years can be included in the accounting process to estimate TMDL reductions. BMP efficiencies were obtained from the 2014 Maryland Department of the Environment (MDE) guidance document entitled: *Accounting for Stormwater Wasteload Allocations and Impervious Acres Treated*.

The load reductions from BMPs calculated based on the loading rates in Table D-3 (i.e., detention basin retrofits, infiltration, bioretention, etc.) represent delivered load reductions because the loading rates are delivered. However, a delivery ratio must be applied to any BMPs with edge of stream load reductions (i.e., stream restoration, street sweeping), as they are being done before any stream processing. In the Double Pipe Creek watershed, the load weighted average TN, TP, and TSS delivery ratios are 0.041, 0.040, and 0.106, respectively. Note the TSS delivery ratio is based on 2001 land use. Delivery ratios are based on total aerial deposited TN, TP, and sediment on urban areas (both impervious and pervious) compared to TN, TP, and TSS at the watershed outlet. These numbers were derived using the GWLF-E model.

Detention Basin Retrofits

Pond retrofits to a sand filter were assumed to be stormwater treatment (ST). The Chesapeake Bay retrofit curves were used along with County design volume to estimate relative TN, TP, and TSS reductions. These relative reductions were coupled with land cover loading rates from GWLF-E and drainage area characteristics to calculate a load reduction.

Water Resource, Floodplain Easements

These practices have previously agreed upon efficiencies of 30%, 40%, and 55% TN, TP, and TSS reductions, respectively (MDE, 2011). A Low Density Mixed land cover is used as the basis for loading rates.

Buffer Strips

Consistent with MDE guidance (MDE, 2014), this BMP has efficiencies of 66%, 77%, and 57%, for TN, TP, and TSS, respectively. A Low Density Mixed land cover is used as the basis for loading rates.

Stream Stabilization

For consistency with the Chesapeake Bay Program as well as taking into account potential headwater stabilization projects not reflected in the blue-line streams used in the MapShed/GWLF-E process, 1000 linear feet of stream stabilization/restoration was set equal to 4.9, 40.2, and 51.0 acres of high density mixed urban (87% impervious) for TN, TP, and TSS, respectively. These equivalencies were based on CBP river segment loading rates and the interim stream restoration credit of 75, 68, and 44,880 lbs of TN, TP, and TSS per 1000 linear feet of stream restoration (i.e. 68 lbs/1000 ft or1.69 lbs P/ac = 40.2 ac/1000 ft). Using this method, only linear feet of stabilization/restoration is needed for reporting. The delivery ratio described above was applied to these estimates as they are being done at the edge of stream before any stream processing.

Infiltration and Bioretention

All infiltration and bioretention projects are treated as runoff reduction (RR) projects. The Chesapeake Bay retrofit curves were used along with County design volume to estimate relative TN, TP, and TSS reductions. These relative reductions were coupled with land cover loading rates from GWLF-E and drainage area characteristics to calculate a load reduction.

Constructed Wetlands

Constructed wetlands were considered a stormwater treatment (ST) practice. The Chesapeake Bay retrofit curves were used along with County design volume to estimate relative TN, TP, and TSS reductions. These relative reductions were coupled with land cover loading rates from GWLF-E and drainage area characteristics to calculate a load reduction.

Street Sweeping and Catch Basin Cleaning

Total Nitrogen (3.5 lbs/ton), TP (1.4 lbs/ton), and TSS (420 lbs/ton) concentrations from catch basin cleaning solids, as reported in the 2014 MDE Guidance, were used along with County measured material removed to make edge of stream estimates. The delivery ratio described above was applied to these estimates as they are being done at the edge of stream before any stream processing.

Impervious Surface Reduction

Impervious surface reduction effectively changes the % impervious for the sub basin. The post processing procedure for this practice was simply the difference in land cover loading rate of high density mixed urban (87% impervious) and low density mixed urban (15% impervious).



XVII. Appendix F: Chesapeake Bay TMDL Edge-of-Stream Load Reduction Calculations

SWM Facilities Impervious

Project	Project	Drainage	Impervious	Practice	Runoff depth	TN Pollutant	Total	TN BMP	TN Pollutant Loads	TP Pollutant	Total	ТР ВМР	TP Pollutant Loads	TSS Pollutant	Total	TSS BMP	TSS Pollutant Loads
Project	Туре	Area (Ac)	Area (Acres)	Туре	treated (In.)	Runoff Load	Loads (lbs)	Efficiency (%)	Reduced (lbs)	Load	Loads (lbs)	Efficiency	Reduced (lbs)	Load	Loads (tons)	Efficiency	Reduced (Tons)
Sunnyside	Facility	30.2	2.69	ST	1.91	15.3	41.1570	39%	16.0402	1.69	4.5461	61%	2.7862	0.44	1.1836	78%	0.9230
Friendship Overlook	Retrofit	82.01	15.88	ST	1.68	15.3	242.9640	39%	93.6804	1.69	26.8372	61%	16.2656	0.44	6.9872	77%	5.3891
CC Farm Museum	Facility	6.44	0.45	RR	1.40	15.3	6.8850	64%	4.4280	1.69	0.7605	75%	0.5720	0.44	0.1980	81%	0.1597
Farm Museum 1	Facility	11.61	2.3	RR	1.44	15.3	35.1900	65%	22.7374	1.69	3.8870	76%	2.9367	0.44	1.0120	81%	0.8198
Farm Museum 2	Facility	0.09	0.05	RR	1.00	15.3	0.7650	60%	0.4571	1.69	0.0845	70%	0.0591	0.44	0.0220	75%	0.0165
Farm Museum 3	Facility	0.79	0.06	RR	1.00	15.3	0.9180	60%	0.5485	1.69	0.1014	70%	0.0709	0.44	0.0264	75%	0.0198
Farm Museum 4	Facility	0.03	0.03	RR	1.00	15.3	0.4590	60%	0.2743	1.69	0.0507	70%	0.0354	0.44	0.0132	75%	0.0099
Farm Museum 5	Facility	0.01	0.01	RR	1.00	15.3	0.1530	60%	0.0914	1.69	0.0169	70%	0.0118	0.44	0.0044	75%	0.0033
CC Maintenance	Retrofit	45.49	25.05	ST	2.50	15.3	383.2650	39%	150.6806	1.69	42.3345	62%	26.2462	0.44	11.0220	79%	8.6866
Blue Ridge Manor	Retrofit	36.28	9.26	RR	1.86	15.3	141.6780	67%	94.3535	1.69	15.6494	78%	12.1825	0.44	4.0744	84%	3.4041
Exceptional Center	Retrofit	46.5	14.7	ST	1.51	15.3	224.9100	38%	85.5642	1.69	24.8430	60%	14.8537	0.44	6.4680	76%	4.9216
Langdon	Facility	194	92.1	ST	1.00	15.3	1409.1300	35%	492.4909	1.69	155.6490	55%	85.4824	0.44	40.5240	70%	28.3263
Locust Wetland	Facility	35.9	11	ST	1.00	15.3	168.3000	35%	58.8209	1.69	18.5900	55%	10.2096	0.44	4.8400	70%	3.3832
CC Health Dept	Facility	14.77	6.72	RR	2.50	15.3	102.8160	68%	69.6064	1.69	11.3568	79%	8.9505	0.44	2.9568	85%	2.5103

Long Valley Rd	Facility	98.32	16.64	RR	2.50	15.3	254.5920	68%	172.3588	1.69	28.1216	79%	22.1632	0.44	7.3216	85%	6.2159
Greens of Westminster Sec6 #2	Retrofit	41	15.6	ST	2.50	15.3	238.6800	39%	93.8370	1.69	26.3640	62%	16.3449	0.44	6.8640	79%	5.4096
New Windsor Railroad Track	Facility	34.5	15.34	ST	1.00	15.3	234.7020	35%	82.0283	1.69	25.9246	55%	14.2378	0.44	6.7496	70%	4.7180
Elmer Wolfe	Facility	9.78	4.26	ST	1.50	15.3	65.1780	38%	24.7725	1.69	7.1994	60%	4.3004	0.44	1.8744	76%	1.4249
Avondale Run Phase 2	Retrofit	7.86	1.84	RR	2.50	15.3	28.1520	68%	19.0589	1.69	3.1096	79%	2.4507	0.44	0.8096	85%	0.6873
Carroll County Airport	Retrofit	38.4	7.4	RR	2.50	15.3	113.2200	68%	76.6499	1.69	12.5060	79%	9.8562	0.44	3.2560	85%	2.7643
Meadow Ridge 171	Retrofit	22.1	5.73	ST	1.00	15.3				1.69				0.44			
Meadow Ridge 172	Retrofit	18.2	5.35	ST	1.00	15.3				1.69				0.44			
	Total:	774.28	252.46				3251.8620		1355.9698		359.1926		219.1707		93.5176		70.1986

SWM Facilities

Pervious Treatment

Project	Project Type	Drainage Area (Ac)	Pervious Area (Ac)	Practice Type	Runoff depth treated (In.)	TN Pollutant Runoff Load	Total Loads (lbs)	TN BMP Efficiency (%)	TN Pollutant Loads Reduced (lbs)	TP Pollutant Load	Total Loads (lbs)	TP BMP Efficiency	TP Pollutant Loads Reduced (lbs)	TSS Pollutant Load	Total Loads (tons)	TSS BMP Efficiency	TSS Pollutant Loads Reduced (Tons)
Sunnyside	Facility	30.2	27.51	ST	1.91	10.8	297.1080	39%	115.7926	0.43	11.8293	61%	7.2500	0.07	1.9257	78%	1.5017
Friendship Overlook	Retrofit	82.01	66.13	ST	1.68	10.8	714.2040	39%	275.3779	0.43	28.4359	61%	17.2345	0.07	4.6291	77%	3.5704
Farm Museum	Facility	6.44	5.99	RR	1.40	10.8	64.6920	64%	41.6061	0.43	2.5757	75%	1.9372	0.07	0.4193	81%	0.3381

Farm Museum 1	Facility	11.61	9.31	RR	1.44	10.8	100.5480	65%	64.9674	0.43	4.0033	76%	3.0246	0.07	0.6517	81%	0.5279
Farm Museum 2	Facility	0.09	0.04	RR	1.00	10.8	0.4320	60%	0.2581	0.43	0.0172	70%	0.0120	0.07	0.0028	75%	0.0021
Farm Museum 3	Facility	0.79	0.73	RR	1.00	10.8	7.8840	60%	4.7107	0.43	0.3139	70%	0.2194	0.07	0.0511	75%	0.0383
Farm Museum 4	Facility	0.03	0	RR	1.00	10.8	0.0000	60%	0.0000	0.43	0.0000	70%	0.0000	0.07	0.0000	75%	0.0000
Farm Museum 5	Facility	0.01	0	RR	1.00	10.8	0.0000	60%	0.0000	0.43	0.0000	70%	0.0000	0.07	0.0000	75%	0.0000
CC Maintenance	Retrofit	45.49	20.44	ST	2.50	10.8	220.7520	39%	86.7886	0.43	8.7892	62%	5.4491	0.07	1.4308	79%	1.1276
Blue Ridge Manor	Retrofit	36.28	27.02	RR	1.86	10.8	291.8160	67%	194.3412	0.43	11.6186	78%	9.0447	0.07	1.8914	84%	1.5802
Exceptional Center	Retrofit	46.5	31.8	ST	1.51	10.8	343.4400	38%	130.6575	0.43	13.6740	60%	8.1757	0.07	2.2260	76%	1.6938
Langdon	Facility	194	101.9	ST	1.00	10.8	1100.5200	35%	384.6317	0.43	43.8170	55%	24.0643	0.07	7.1330	70%	4.9860
Locust Wetland	Facility	35.9	24.9	ST	1.00	10.8	268.9200	35%	93.9875	0.43	10.7070	55%	5.8803	0.07	1.7430	70%	1.2184
CC Health Dept	Facility	14.77	8.05	RR	2.50	10.8	86.9400	68%	58.8584	0.43	3.4615	79%	2.7281	0.07	0.5635	85%	0.4784
Long Valley Rd	Facility	98.32	81.68	RR	2.50	10.8	882.1440	68%	597.2115	0.43	35.1224	79%	27.6806	0.07	5.7176	85%	4.8541
Greens of Westminster Sec6 #2	Retrofit	41	25.4	ST	2.50	10.8	274.3200	39%	107.8489	0.43	10.9220	62%	6.7713	0.07	1.7780	79%	1.4013
New Windsor Railroad Track	Facility	34.5	19.16	ST	1.00	10.8	206.9280	35%	72.3213	0.43	8.2388	55%	4.5247	0.07	1.3412	70%	0.9375
Elmer Wolfe	Facility	9.78	5.52	ST	1.50	10.8	59.6160	38%	22.6586	0.43	2.3736	60%	1.4178	0.07	0.3864	76%	0.2937
Avondale Run Phase 2	Retrofit	7.86	6.02	RR	2.50	10.8	65.0160	68%	44.0158	0.43	2.5886	79%	2.0401	0.07	0.4214	85%	0.3578
Carroll County Airport	Retrofit	38.4	31	RR	2.50	10.8	334.8000	68%	226.6596	0.43	13.3300	79%	10.5056	0.07	2.1700	85%	1.8423
Meadow Ridge 171	Retrofit	22.1	16.37	ST	1.00	10.8				0.43				0.07			
Meadow Ridge 172	Retrofit	18.2	12.85	ST	1.00	10.8				0.43				0.07			

			 				_			
Total:	774.28	521.82		4653,7200	2157.0383	185.2870		119.4717	30.1630	23.3183
1014	,,20	321.02		103317200	2257.0505	103.2070		11311717	30.1030	20.0200

Catch Basin/inlet Cleaning

Location	Tons	TN lbs reduced/ton	TN Pollutant Loads Reduced (lbs)	TP lbs reduced/ton	TP Pollutant Loads Reduced (lbs)	TSS lbs reduced/ton	TSS Pollutant Loads Reduced (lbs)	TSS Pollutant Loads Reduced (Tons)
Manchester	0.42	3.5	1.470	1.4	0.588	420	176.4	0.088
New Windsor	0.08	3.5	0.280	1.4	0.112	420	33.6	0.017
Union Bridge	0.72	3.5	2.520	1.4	1.008	420	302.4	0.151
Westminster	0.44	3.5	1.540	1.4	0.616	420	184.8	0.092
		Total:	5.8100		2.3240		697	0.349

Street Sweeping

Location	Acres	TN Pollutant Load	Total Loads (lbs)	TN BMP Efficiency (%)	TN Pollutant Loads Reduced (lbs)	TP Pollutant Load	Total Loads (lbs)	TP BMP Efficiency	TP Pollutant Loads Reduced (lbs)	TSS Pollutant Load (tons/ac)	Total Loads (tons)	TSS BMP Efficiency	TSS Pollutant Loads Reduced (Tons)
Westminster	7.62	11.7	89.154	4	3.56616	0.68	5.1816	4	0.207264	0.18	1.3716	10	0.13716
		Total:	89.1540		3.5662		5.1816		0.2073		1.3716		0.1372

Streambank

Regeneration

Location	Linear Feet	TN lbs reduced/linear ft	TN Pollutant Loads Reduced (lbs)	TP lbs reduced/linear ft	TP Pollutant Loads Reduced (lbs)	TSS lbs reduced/linear ft	TSS Pollutant Loads Reduced (lbs)	TSS Pollutant Loads Reduced (Tons)
Blue Ridge Manor	220	0.075	16.500	0.068	14.960	44.8	9856	4.928
		Total:	16.5000		14.9600		9,856	4.928

Stream Restoration

Location	Linear Feet	TN lbs reduced/linear ft	TN Pollutant Loads Reduced (lbs)	TP lbs reduced/linear ft	TP Pollutant Loads Reduced (lbs)	TSS lbs reduced/linear ft	TSS Pollutant Loads Reduced (lbs)	TSS Pollutant Loads Reduced (Tons)
Dickenson Run	2580	0.075	193.500	0.068	175.440	44.8	115584	57.792
		Total:	193.5000		175.4400		115,584	57.792

Floodplain Reconnect

							TSS Pollutant	
Location	Linear Feet	TN lbs reduced/linear ft	TN Pollutant Loads Reduced (lbs)	TP lbs reduced/linear ft	TP Pollutant Loads Reduced (lbs)	TSS lbs reduced/linear ft	Loads Reduced (lbs)	TSS Pollutant Loads Reduced (Tons)
Mayberry Gun Club	6,255.00	0.075	469.125	0.068	425.340	44.8	280224	140.112
		Total:	469.1250		425.3400		280,224	140.112

Stream Buffer Plantings

Project	Acres	TN Pollutant Load	Total Loads (lbs)	TN BMP Efficiency (%)	TN Pollutant Loads Reduced (lbs)	TP Pollutant Load	Total Loads (lbs)	TP BMP Efficiency	TP Pollutant Loads Reduced (lbs)	TSS Pollutant Load	Total Loads (tons)	TSS BMP Efficiency	TSS Pollutant Loads Reduced (Tons)
Planting 1	4.13	10.8	44.6040	66	29.4386	0.43	1.7759	77	1.3674	0.07	0.2891	57	0.1648
Planting 2	10.85	10.8	117.1800	66	77.3388	0.43	4.6655	77	3.5924	0.07	0.7595	57	0.4329
Planting 3	0.2	10.8	2.1600	66	1.4256	0.43	0.0860	77	0.0662	0.07	0.0140	57	0.0080
Planting 4	1.4	10.8	15.1200	66	9.9792	0.43	0.6020	77	0.4635	0.07	0.0980	57	0.0559
Planting 5	0.5	10.8	5.4000	66	3.5640	0.43	0.2150	77	0.1656	0.07	0.0350	57	0.0200
Planting 6	0.3	10.8	3.2400	66	2.1384	0.43	0.1290	77	0.0993	0.07	0.0210	57	0.0120
Planting 7	0.65	10.8	7.0200	66	4.6332	0.43	0.2795	77	0.2152	0.07	0.0455	57	0.0259
Planting 8	2.3	10.8	24.8400	66	16.3944	0.43	0.9890	77	0.7615	0.07	0.1610	57	0.0918
Planting 9	0.4	10.8	4.3200	66	2.8512	0.43	0.1720	77	0.1324	0.07	0.0280	57	0.0160
Planting 10	2.25	10.8	24.3000	66	16.0380	0.43	0.9675	77	0.7450	0.07	0.1575	57	0.0898
Planting 11	0.2	10.8	2.1600	66	1.4256	0.43	0.0860	77	0.0662	0.07	0.0140	57	0.0080
Planting 12	0.62	10.8	6.6960	66	4.4194	0.43	0.2666	77	0.2053	0.07	0.0434	57	0.0247
Planting 13	1.8	10.8	19.4400	66	12.8304	0.43	0.7740	77	0.5960	0.07	0.1260	57	0.0718
Planting 14	0.9	10.8	9.7200	66	6.4152	0.43	0.3870	77	0.2980	0.07	0.0630	57	0.0359
Planting 15	0.26	10.8	2.8080	66	1.8533	0.43	0.1118	77	0.0861	0.07	0.0182	57	0.0104
Planting 16	3	10.8	32.4000	66	21.3840	0.43	1.2900	77	0.9933	0.07	0.2100	57	0.1197
Planting 17	9	10.8	97.2000	66	64.1520	0.43	3.8700	77	2.9799	0.07	0.6300	57	0.3591
Planting 18	0.13	10.8	1.4040	66	0.9266	0.43	0.0559	77	0.0430	0.07	0.0091	57	0.0052
Planting 19	0.6	10.8	6.4800	66	4.2768	0.43	0.2580	77	0.1987	0.07	0.0420	57	0.0239

Planting 22 Planting 23	0.45	10.8	4.8600 23.7600	66	3.2076 15.6816	0.43	0.1935 0.9460	77	0.1490	0.07	0.0315 0.1540	57 57	0.0180
Planting 24	1.62	10.8	17.4960	66	11.5474	0.43	0.6966	77	0.7284	0.07	0.1134	57	0.0646
Planting 25	4.26	10.8	46.0080	66	30.3653	0.43	1.8318	77	1.4105	0.07	0.2982	57	0.1700
Planting 26	1.8	10.8	19.4400	66	12.8304	0.43	0.7740	77	0.5960	0.07	0.1260	57	0.0718
Planting 27	2.05	10.8	22.1400	66	14.6124	0.43	0.8815	77	0.6788	0.07	0.1435	57	0.0818
Planting 28	0.59	10.8	6.3720	66	4.2055	0.43	0.2537	77	0.1953	0.07	0.0413	57	0.0235
Planting 29	0.44	10.8	4.7520	66	3.1363	0.43	0.1892	77	0.1457	0.07	0.0308	57	0.0176
Planting 30	0.17	10.8	1.8360	66	1.2118	0.43	0.0731	77	0.0563	0.07	0.0119	57	0.0068
Planting 31	0.22	10.8	2.3760	66	1.5682	0.43	0.0946	77	0.0728	0.07	0.0154	57	0.0088
Total:	54.74		591.1920		390.1867		23.5382		18.1244		3.8318		2.1841

Water Resource Easements--Efficiency factors from 2011 Guidance

		Recorded	TN			TN Pollutant	TP			TP Pollutant	TSS			TSS Pollut
Subdivision	Acres	Recorded	Pollutant	Total	TN BMP	Loads	Pollutant	Total	TP BMP	Loads	Pollutant	Total	TSS BMP	Loads
Subdivision	Acres	Date	Load	Loads	Efficiency	Reduced (lbs)	Load	Loads	Efficiency	Reduced (lbs)	Load	Loads	Efficiency	Reduced (T
		Date		(lbs)	(%)			(lbs)				(tons)		
Ellen's Dilemma	0.695	8/25/2000	11.7	8.1365	30	2.44096	0.68	0.4729	40	0.1892	0.18	0.1252	55	0.0688
Catoctin Summit 2	0.016	1/25/2001	11.7	0.1872	30	0.05616	0.68	0.0109	40	0.0044	0.18	0.0029	55	0.0016
Sun Valley, Section 2	0.013	6/4/2001	11.7	0.1521	30	0.04563	0.68	0.0088	40	0.0035	0.18	0.0023	55	0.0013
Coventry at Westminster	0.344	11/30/2001	11.7	4.0248	30	1.20744	0.68	0.2339	40	0.0936	0.18	0.0619	55	0.0341
New Beginnings	4.303	5/16/2002	11.7	50.3481	30	15.10444	0.68	2.9262	40	1.1705	0.18	0.7746	55	0.4260
Doves Crest	0.484	4/22/2003	11.7	5.6628	30	1.69884	0.68	0.3291	40	0.1316	0.18	0.0871	55	0.0479
Greenwood Overlook	2.233	1/25/2005	11.7	26.1235	30	7.83706	0.68	1.5183	40	0.6073	0.18	0.4019	55	0.2210

		1	i				п г							
Snavely Forest	9.530	4/12/2005	11.7	111.5010	30	33.45030	0.68	6.4804	40	2.5922	0.18	1.7154	55	0.943
Naomi's Delight, Section 4	4.998	5/4/2005	11.7	58.4798	30	17.54395	0.68	3.3988	40	1.3595	0.18	0.8997	55	0.494
Camelot Plaza, Section One	0.445	6/17/2005	11.7	5.2065	30	1.56195	0.68	0.3026	40	0.1210	0.18	0.0801	55	0.044
Brilhart Property	0.437	7/8/2005	11.7	5.1128	30	1.53383	0.68	0.2972	40	0.1189	0.18	0.0787	55	0.043
Stone's Throw	0.495	7/14/2005	11.7	5.7915	30	1.73745	0.68	0.3366	40	0.1346	0.18	0.0891	55	0.049
Heather's Land	1.150	11/3/2005	11.7	13.4528	30	4.03583	0.68	0.7819	40	0.3127	0.18	0.2070	55	0.113
Schatzies Choice	0.707	12/15/2005	11.7	8.2757	30	2.48270	0.68	0.4810	40	0.1924	0.18	0.1273	55	0.070
Walgarmyr	3.992	12/22/2005	11.7	46.7064	30	14.01192	0.68	2.7146	40	1.0858	0.18	0.7186	55	0.395
Hoke Property, 2nd Off Conveyance	10.641	5/22/2006	11.7	124.4997	30	37.34991	0.68	7.2359	40	2.8944	0.18	1.9154	55	1.053
Burleson Property	0.287	9/12/2006	11.7	3.3530	30	1.00590	0.68	0.1949	40	0.0780	0.18	0.0516	55	0.028
Bowling Brook	20.341	10/2/2006	11.7	237.9897	30	71.39691	0.68	13.8319	40	5.5328	0.18	3.6614	55	2.013
Westvale	0.419	11/21/2006	11.7	4.8995	30	1.46984	0.68	0.2848	40	0.1139	0.18	0.0754	55	0.041
Spring Meadow, Amended Plat Tract 1	0.591	1/23/2007	11.7	6.9132	30	2.07396	0.68	0.4018	40	0.1607	0.18	0.1064	55	0.058
Sterling Ridge Estates	1.454	11/15/2007	11.7	17.0176	30	5.10527	0.68	0.9891	40	0.3956	0.18	0.2618	55	0.144
Dutchmans' Bluff	4.463	2/28/2008	11.7	52.2171	30	15.66513	0.68	3.0348	40	1.2139	0.18	0.8033	55	0.441
Key Estates	0.368	6/5/2008	11.7	4.3056	30	1.29168	0.68	0.2502	40	0.1001	0.18	0.0662	55	0.036
Johnson Property	0.407	6/5/2008	11.7	4.7574	30	1.42723	0.68	0.2765	40	0.1106	0.18	0.0732	55	0.040
Lehigh Cement Company	56.861	9/17/2008	11.7	665.2737	30	199.58211	0.68	38.6655	40	15.4662	0.18	10.2350	55	5.629
Bark Hill Park	0.111	11/4/2008	11.7	1.2987	30	0.38961	0.68	0.0755	40	0.0302	0.18	0.0200	55	0.011
Bixler Property Hangover Parcel	3.268	9/16/2009	11.7	38.2340	30	11.47020	0.68	2.2221	40	0.8889	0.18	0.5882	55	0.323
Greenvale Mews	2.473	3/5/2010	11.7	28.9341	30	8.68023	0.68	1.6816	40	0.6727	0.18	0.4451	55	0.244
Krom's Keep	0.007	3/9/2010	11.7	0.0819	30	0.02457	0.68	0.0048	40	0.0019	0.18	0.0013	55	0.000
Watts Property	1.059	4/12/2010	11.7	12.3960	30	3.71881	0.68	0.7205	40	0.2882	0.18	0.1907	55	0.104
Big Pipe Overlook	0.318	4/16/2010	11.7	3.7249	30	1.11748	0.68	0.2165	40	0.0866	0.18	0.0573	55	0.031
Cox Hillside	0.117	4/22/2010	11.7	1.3689	30	0.41067	0.68	0.0796	40	0.0318	0.18	0.0211	55	0.011
Drifting Snow	0.810	6/2/2010	11.7	9.4750	30	2.84249	0.68	0.5507	40	0.2203	0.18	0.1458	55	0.080
Dachille Property	2.518	6/25/2010	11.7	29.4603	30	8.83808	0.68	1.7122	40	0.6849	0.18	0.4532	55	0.249

	182.307		Total:	2132.9917		639.89750		38.4348		15.3739		32.8153		18.04
McNemar Property OC #1	0.905	4/20/2017	11.7	10.5885	30	3.17655	0.68	0.6154	40	0.2462	0.18	0.1629	55	0.089
Medford Quarry Amended	9.217	3/30/2017	11.7	107.8389	30	32.35167	0.68	6.2676	40	2.5070	0.18	1.6591	55	0.912
Richardson Property	1.127	10/12/2016	11.7	13.1859	30	3.95577	0.68	0.7664	40	0.3065	0.18	0.2029	55	0.111
Lehigh New Windsor Quarry	13.211	2/25/2015	11.7	154.5635	30	46.36905	0.68	8.9832	40	3.5933	0.18	2.3779	55	1.307
Was-Mere Acres	2.811	1/5/2015	11.7	32.8887	30	9.86661	0.68	1.9115	40	0.7646	0.18	0.5060	55	0.278
Vista Green	0.448	9/16/2014	11.7	5.2416	30	1.57248	0.68	0.3046	40	0.1219	0.18	0.0806	55	0.044
Jacob's Ridge 3	0.398	11/9/2012	11.7	4.6566	30	1.39698	0.68	0.2706	40	0.1083	0.18	0.0716	55	0.039
Jacobs Ridge 2	0.010	7/26/2012	11.7	0.1170	30	0.03510	0.68	0.0068	40	0.0027	0.18	0.0018	55	0.001
Jordans Crossing	1.365	1/5/2012	11.7	15.9662	30	4.78986	0.68	0.9280	40	0.3712	0.18	0.2456	55	0.135
Bedford Falls Farm	3.717	8/1/2011	11.7	43.4889	30	13.04667	0.68	2.5276	40	1.0110	0.18	0.6691	55	0.368
Father's Care, LLC Property	1.909	6/9/2011	11.7	22.3363	30	6.70088	0.68	1.2982	40	0.5193	0.18	0.3436	55	0.189
Nadine's Overlook	2.032	6/3/2011	11.7	23.7744	30	7.13232	0.68	1.3818	40	0.5527	0.18	0.3658	55	0.201
Carroll County Public Transportation Building	8.802	12/10/2010	11.7	102.9834	30	30.89502	0.68	5.9854	40	2.3941	0.18	1.5844	55	0.871

Floodplain Easements--Efficiency factors from 2011 Guidance

Subdivision		Recorded Date	TN Pollutant	Total	TN BMP	TN Pollutant Loads	TP Pollutant	Total	ТР ВМР	TP Pollutant Loads	TSS Pollutant	Total	TSS BMP	TSS Po
	Acres		Load	Loads (lbs)	Efficiency (%)	Reduced (lbs)	Load	Loads (lbs)	Efficiency	Reduced (lbs)	Load	Loads (tons)	Efficiency	Reduce
Doves Crest	0.637	4/9/2003	11.7	7.4529	30	2.2359	0.68	0.4332	40	0.1733	0.18	0.1147	55	0.0
Greenwood Overlook	0.022	12/20/2004	11.7	0.2595	30	0.0779	0.68	0.0151	40	0.0060	0.18	0.0040	55	0.0
Sunny View Acres	0.063	1/14/2005	11.7	0.7326	30	0.2198	0.68	0.0426	40	0.0170	0.18	0.0113	55	0.0
Snavely Forest	0.014	4/11/2005	11.7	0.1638	30	0.0491	0.68	0.0095	40	0.0038	0.18	0.0025	55	0.0
Naomi's Delight	0.242	4/28/2005	11.7	2.8268	30	0.8480	0.68	0.1643	40	0.0657	0.18	0.0435	55	0.0
Brilhart Property	0.227	6/16/2005	11.7	2.6605	30	0.7981	0.68	0.1546	40	0.0619	0.18	0.0409	55	0.0
Camelot Plaza	6.467	6/17/2005	11.7	75.6639	30	22.6992	0.68	4.3976	40	1.7590	0.18	1.1641	55	0.6
Stone's Throw, Section 2	2.132	6/23/2005	11.7	24.9444	30	7.4833	0.68	1.4498	40	0.5799	0.18	0.3838	55	0.2

	i i	i .	n .		i	i								
Heather's Land	0.002	11/3/2005	11.7	0.0282	30	0.0085	0.68	0.0016	40	0.0007	0.18	0.0004	55	0.0
Walgarmyr, Section 2	0.157	12/22/2005	11.7	1.8369	30	0.5511	0.68	0.1068	40	0.0427	0.18	0.0283	55	0.0
Hoke Property, OC #2	3.246	5/31/2006	11.7	37.9783	30	11.3935	0.68	2.2073	40	0.8829	0.18	0.5843	55	0.3
Bowling Brook	0.635	10/2/2006	11.7	7.4295	30	2.2289	0.68	0.4318	40	0.1727	0.18	0.1143	55	0.0
Arters Mill Estates	1.124	11/30/2006	11.7	13.1550	30	3.9465	0.68	0.7646	40	0.3058	0.18	0.2024	55	0.1
Sterling Ridge Estates	0.003	11/15/2007	11.7	0.0301	30	0.0090	0.68	0.0017	40	0.0007	0.18	0.0005	55	0.0
Dutchmans' Bluff	4.650	2/28/2008	11.7	54.4050	30	16.3215	0.68	3.1620	40	1.2648	0.18	0.8370	55	0.4
Lehigh Cement Company	24.398	9/17/2008	11.7	285.4566	30	85.6370	0.68	16.5906	40	6.6363	0.18	4.3916	55	2.4
Uniontown Bible Church	9.775	10/14/2008	11.7	114.3675	30	34.3103	0.68	6.6470	40	2.6588	0.18	1.7595	55	0.9
Schatzie's Choice, Section 2	0.047	8/18/2009	11.7	0.5495	30	0.1648	0.68	0.0319	40	0.0128	0.18	0.0085	55	0.0
Silver Run Estates - Lot 1	0.802	8/21/2009	11.7	9.3863	30	2.8159	0.68	0.5455	40	0.2182	0.18	0.1444	55	0.0
Greenvale Mews	0.633	3/2/2010	11.7	7.4061	30	2.2218	0.68	0.4304	40	0.1722	0.18	0.1139	55	0.0
Krom's Keep	0.000	3/3/2010	11.7	0.0000	30	0.0000	0.68	0.0000	40	0.0000	0.18	0.0000	55	0.0
Bixler Hangover Parcel	0.039	4/4/2010	11.7	0.4563	30	0.1369	0.68	0.0265	40	0.0106	0.18	0.0070	55	0.0
Cox Hillside	0.043	4/22/2010	11.7	0.5031	30	0.1509	0.68	0.0292	40	0.0117	0.18	0.0077	55	0.0
Drifting Snow	0.068	5/25/2010	11.7	0.7902	30	0.2371	0.68	0.0459	40	0.0184	0.18	0.0122	55	0.0
Nadine's Overlook	0.749	6/3/2011	11.7	8.7633	30	2.6290	0.68	0.5093	40	0.2037	0.18	0.1348	55	0.0
Father's Care, LLC Property	0.411	6/9/2011	11.7	4.8094	30	1.4428	0.68	0.2795	40	0.1118	0.18	0.0740	55	0.0
Bedford Falls Farm	0.209	8/1/2011	11.7	2.4453	30	0.7336	0.68	0.1421	40	0.0568	0.18	0.0376	55	0.0
Jordans Crossing	0.023	1/5/2012	11.7	0.2691	30	0.0807	0.68	0.0156	40	0.0063	0.18	0.0041	55	0.0
Jacob's Ridge 2	0.001	7/26/2012	11.7	0.0117	30	0.0035	0.68	0.0007	40	0.0003	0.18	0.0002	55	0.0
Jacob's Ridge 3	0.005	11/9/2012	11.7	0.0613	30	0.0184	0.68	0.0036	40	0.0014	0.18	0.0009	55	0.0
Was-Mere Acres	5.784	3/24/2015	11.7	67.6728	30	20.3018	0.68	3.9331	40	1.5732	0.18	1.0411	55	0.
Wakefield Solar	1.594	4/6/2018	11.7	18.6498	30	5.5949	0.68	1.0839	40	0.4336	0.18	0.2869	55	0.:
	64.202		Total:	751.1657		225.3497		7.0775		2.8310		11.5564		6.3

